

04/10/00
JC759 U.S. PTO

LAW OFFICES
SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, D.C. 20037-3202
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

A
JC586 U.S. PTO
09/546189
04/10/00

CALIFORNIA OFFICE

1010 EL CAMINO REAL
MENLO PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

April 10, 2000

JAPAN OFFICE

TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

BOX: PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Re: Application of Haruki HANAZONO and Shoji KOJIMA
**PRINTING CONTROL METHOD, PRINTING CONTROL APPARATUS FOR
PRODUCING/TRANSMITTING PRINT COMMAND, COMPUTER PROGRAM OF PRINTING
CONTROL, AND RECORDING MEDIUM FOR RECORDING COMPUTER PROGRAM**
Our Reference: Q58718

Dear Sir:

Attached hereto is the application identified above including the specification, claims and nineteen (19) sheets of drawings. The requisite U.S. Government Filing Fee, executed Declaration and Power of Attorney and Assignment will be submitted at a later date.

The Government filing fee is calculated as follows:

Total Claims	22 - 20 =	2 x \$18 =	\$ 36.00
Independent Claims	6 - 3 =	3 x \$78 =	\$ 234.00
Base Filing Fee	(\$690.00)		\$ 690.00
Multiple Dep. Claim Fee	(\$260.00)		\$ 000.00
TOTAL FILING FEE			\$ 960.00

Priority is claimed from:

Japanese Patent Application

11-101773
11-101774
2000-086725

Filing Date


April 8, 1999
April 8, 1999
March 27, 2000

The priority documents will be submitted at a later date.

Since the anniversary of the priority date fell on a Saturday, the filing of this application on Monday, April 10, 2000, is sufficient to obtain the benefit of priority.

Respectfully submitted,
SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By:


Darryl Mexic
Reg. No. 23,063

DM:plr

PRINTING CONTROL METHOD, PRINTING CONTROL
APPARATUS FOR PRODUCING/TRANSMITTING PRINT
COMMAND, COMPUTER PROGRAM OF PRINTING CONTROL,
AND RECORDING MEDIUM FOR RECORDING COMPUTER PROGRAM

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to a printing control
method capable of saving an amount of use in a hard disk
drive, a printing control apparatus for executing this
5 printing control method, and a recording medium for
recording a computer program to be used to execute the
printing control method by a computer.

DESCRIPTION OF RELATED ART

To perform a highspeed printing operation by a
10 printing apparatus, such a printing control system has been
proposed that both a process operation for converting image
data to be printed (will be referred to as "print data"
hereinafter) into a print command, and another process
operation for transmitting this print command to the
15 printing apparatus are executed in a parallel manner in
separate processes.

In this sort of printing control system, the
printing process operation is carried out as follows: First,
upon receipt of a print request issued from an application

program (AP), a print managing unit issues a print job.
Next, a print processing unit receives this print job to
produce print data to be printed out. Then, the print
processing unit converts this produced print data into a
5 print command having a specific format to a printing
apparatus, and also stores this print command into a hard
disk drive (HDD) as an intermediate file. The print
command saved in the intermediate file is read out by a
command transmitting unit, and then the read print command
10 is stored into a SPOOL (Simultaneous Peripheral Operations
OnLine) file by a spooler. Then, the print command is
properly read out from the SPOOL file by a despooler, and
thereafter, is transferred to the printing apparatus.

The above-described print processing operation by
15 the print processing unit is separately carried out with
respect to the command transmitting process operation by
the command transmitting unit. However, since the
processing speed of the command transmitting unit depends
upon data transfer speed to the printing apparatus,
20 generally speaking, this processing speed is slower than
the processing speed of the print processing unit. To
absorb a difference between both these processing speeds,
while one print command is transmitted to the printing
apparatus, subsequent print commands are stored as an
25 intermediate file into the hard disk drive.

As explained above, in the case of such a printing

control system that the print command is stored into the hard disk drive, however, all of the print commands related to one print job are saved until this print job is completed. As a result, the print commands will occupy
5 large numbers of storage areas within the hard disk drive. As a result, when a storage capacity of a hard disk drive is small, there is a risk that these stored print commands may disturb operations of other application programs. Also, in such a printing case that a total amount of print
10 commands to be stored is very large, for example, in the case that a large-sized area is printed out, if there is only small empty storage areas within a hard disk drive, then certain amounts of print commands cannot be stored into the small empty areas of this hard disk drive.
15 Accordingly, there are possibilities that the printing operation is interrupted in a half way.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a printing control technique capable of storing print commands into a small number of storage areas even when a
20 total amount of these print commands is increased, and also capable of avoiding an interruption of printing operation.

To achieve the above-described object, a printing control method, according to an aspect of the present invention, is featured by causing a computer to execute; a

process operation for storing a print command converted
from print data into a memory; a process operation for
reading the stored print command to transmit the read print
command to a printing apparatus; and a process operation
5 which makes, when a print command is read out, the storage
area of the memory where the print command has been stored
be rewritable.

BRIEF DESCRIPTION OF THE DRAWINGS

For a better understanding of the present invention,
reference is made to a detailed description to be read in
10 conjunction with the accompanying drawings, in which:

Fig. 1 is a schematic block diagram for representing
an arrangement of a printing system to which the present
invention is applied;

Fig. 2 is a schematic block diagram for showing an
15 arrangement of a major unit of a printing control apparatus
according to a first embodiment mode of the present
invention;

Fig. 3 is an explanatory diagram for explaining an
example of control data stored in a control memory employed
20 in the printing control apparatus of the first embodiment
mode;

Fig. 4 is a flow chart for describing a process
operation of a print processing unit employed in the
printing control apparatus of the first embodiment mode;

Fig. 5 is a flow chart for describing a process operation of a command transmitting unit employed in the printing control apparatus of the first embodiment mode;

Fig. 6 is an explanatory diagram for explaining an example of control data stored in a control memory employed in a printing control apparatus of a second embodiment mode;

Fig. 7 is a flow chart for describing a process operation of a print processing unit employed in the printing control apparatus of the second embodiment mode;

Fig. 8 is a flow chart for describing a process operation of a command transmitting unit employed in the printing control apparatus of the second embodiment mode;

Fig. 9 is a schematic block diagram for indicating an arrangement of a major unit of a printing control apparatus according to a third embodiment mode of the present invention;

Fig. 10 is a schematic block diagram for indicating an arrangement of a major unit of a printing control apparatus according to a fourth embodiment mode of the present invention;

Fig. 11 is an explanatory diagram for explaining an example of control data stored in a control memory employed in the printing control apparatus of the fourth embodiment mode;

Fig. 12 is an explanatory diagram for explaining an

example of control data stored in a control memory employed in the printing control apparatus of the fourth embodiment mode;

Fig. 13 is a flow chart for describing a process
5 operation of a print processing unit employed in the printing control apparatus of the fourth embodiment mode;

Fig. 14 is a flow chart for describing a process operation of a command transmitting unit employed in the printing control apparatus of the fourth embodiment mode;

10 Fig. 15 is a schematic block diagram for showing an arrangement of a major unit of a printing control apparatus according to a fifth embodiment mode of the present invention;

Fig. 16 is a flow chart for describing a process
15 operation of a print managing unit employed in the printing control apparatus of the fifth embodiment mode;

Fig. 17 is an explanatory diagram for explaining an example of control data stored in a control memory employed in the printing control apparatus of the fifth embodiment
20 mode;

Fig. 18 is a flow chart for describing a process operation of a print processing unit employed in the printing control apparatus of the fifth embodiment mode;
and

25 Fig. 19 is a flow chart for describing a process operation of a command transmitting unit employed in the

printing control apparatus of the fifth embodiment mode.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to drawings, various embodiment modes of the present invention will be described in detail. It should be understood that the present invention is not
5 limited to the below-mentioned embodiment modes.

OVERALL ARRANGEMENT OF PRINTING SYSTEM

Fig. 1 schematically indicates an example of a printing system to which the present invention is applied. This printing system is arranged by connecting a host
10 computer 1 via a cable to a printing apparatus 2. When the printing apparatus 2 receives both data to be printed and format information given to this print data from the host computer 1, this printing apparatus 2 executes a predetermined printing process so as to form an image on a
15 print paper.

As the printing apparatus 2, if a printer may have the above-explained function, then any types of printers may be employed. For example, a serial printer, a page printer, and the like may be employed. Also, the inventive
20 idea of the present invention may be applied to various sorts of printers. For instance, this inventive idea of the present invention may be applied to the following printers. First, there is a printer which prints out a text, an image, and the like formed on a computer. Second,

there is a printer which prints out an image produced by using an image scanner. Third, there is a printer which prints out an image and the like produced by employing a digital still camera. Furthermore, various connecting
5 modes between the printing apparatus 2 and the host computer 1 may be employed. For instance, a local connecting mode and a network connecting mode may be freely employed.

Under control of a system computer program, the host
10 computer 1 executes programs, controls and monitors the executions of these programs. Concretely speaking, this host computer 1 is equipped with a CPU (Central Processing Unit) 1a, a ROM (Read-Only Memory) 1b, a RAM (Random Access Memory) 1c, and also as an auxiliary storage apparatus,
15 either a built-in type hard disk unit (drive) or an externally-provided type hard disk unit HDD 3. The CPU 1a, the ROM 1b, and the RAM 1c are mounted on, for example, a system board. An application program (AP), and various sorts of programs are stored in this HDD 3. The
20 application program is used to produce data to be printed out, and format information. As the programs, there is a print control program by which the host computer 1 may function as a printing control apparatus. The CPU 1a loads a program which is required to be executed from the HDD 3
25 to the RAM 1c, and then executes a process operation by using this program.

Furthermore, a display apparatus 4 having a monitor screen, an input apparatus 5, a media reading apparatus 6, and a communication control apparatus 7 are connected to this host computer 1. The input apparatus 5 is used to
5 input various sorts of setting information. The communication control apparatus 7 functions as a connection interface between the host computer 1 and a local area network (LAN). Various sorts of images made by image data sent from the host computer 1 are displayed on the display
10 apparatus 4. For instance, the display apparatus 4 displays thereon a dialog window for a print instruction in response to an instruction issued from the system program, the application program, the print control program, and so on. As the input apparatus 5, a keyboard and a pointing
15 device such as a mouse are connected to the host computer 1. As the media reading apparatus 6, one sort, or more than two sorts of apparatuses are connected to the host computer 1, for instance, for reading data from a portable type recording medium such as a CD-ROM, a flexible disk (floppy
20 disk), an opto-magnetic disk and a memory card and writing data into the recording medium when the medium is writable.

Normally, the print control program is developed by the manufacturer of the printing apparatus 2. Concretely speaking, the print control program is recorded in a
25 computer readable format by this host computer 1 on a portable type recording medium, for example, a flexible

(floppy) disk (FD) and a CD-ROM. Then, this program-recorded recording medium is put in a market. When the printing apparatus 2 is used, this print control program is read through the media reading apparatus 6 by the host
5 computer 1, and thereafter, is installed in the HDD 3. Alternatively, the print control program may be installed by employing a print control program which is down-loaded via a network.

VARIOUS PRINTING FUNCTIONS OF FIRST PRINTING CONTROL

10

APPARATUS

Next, various printing functions of a printing apparatus will now be explained with reference to Fig. 2. These printing functions are realized by executing the print control program by the host computer 1.

15

Fig. 2 illustratively shows a structure of various functions realized by a printing control apparatus according to a first embodiment mode of the present invention. As shown in Fig. 2, the printing control apparatus, according to this first embodiment mode, is
20 provided, as the functions thereof, with a print processing unit 12, a shared memory 15, a command transmitting unit 14, a spooler 17, a spooler file 18, a despooler 19, a print managing unit 11, and a control memory 16. The print processing unit 12 produces a print command. The shared
25 memory 15 is such a memory for temporarily storing the produced print command. The command transmitting unit 14

reads a print command stored in the shared memory 15, and then transmits the read print command to the printing apparatus 2. The print managing unit 11 manages the operations of the print processing unit 12 and of the command transmitting unit 14. The control memory 16 stores
5 therein data for use in managing both the print processing unit 12 and the command transmitting unit 14.

The print processing unit 12 functions as means capable of producing print data to be printed out, and also
10 capable of converting this print data into a print command having a format specific to this printing apparatus 2. Also, the print processing apparatus functions as another process means for storing the converted print command into the shared memory 15. Furthermore, this print processing
15 unit 12 also performs such a process operation that various sorts of information related to a print condition sent from the print managing unit 11 are set to the control memory 16. Alternatively, the setting of these various sorts of print condition information may be directly performed by the
20 print managing unit 11. Further, as will be explained later, a memory managing unit may be provided, so that it sets these various sorts of print condition.

The command transmitting unit 14 executes such a process operation that a print command stored in the shared
25 memory 15 is read out and the read print command is transmitted to the printing apparatus. Concretely speaking,

the command transmitting unit 14 reads the print command from the shared memory 15 and then supplies the read print command to the spooler 17. Also, the command transmitting unit 14 executes such a releasing process operation that a storage area of the shared memory 15 into which the transmitted print command has been stored is set to be a rewritable area into which a new print command can be stored.

The spooler 17 transfers a print command transmitted from the command transmitting unit 14 to the spool file 18. The despooler 19 reads out print data which has been spool-processed into the spool file 18 at proper timing, and then transfers the read print data to the printing apparatus 2.

The process operation by the print processing unit 12 and the process operation by the command transmitting unit 14 are separately carried out under control of the CPU 1a. As a result, in appearance, the process operations of both the print processing unit 12 and the command transmitting unit 14 are executed in a parallel mode. When an acceptance of a print job is notified from the print managing unit 11 to the print processing unit 12, the printing operation is performed actually by the printing control apparatus 10.

In this first embodiment mode, both the shared memory 15 and the control memory 16 are provided in, for instance, the RAM 1c. Both the shared memory 15 and the

control memory 16 are provided in such a manner that either of the shared memory 15 and the control memory 16 may be accessed by both the printing processing unit 12 and the command transmitting unit 14. The shared memory 15 temporarily stores therein a print command. In this first embodiment mode, the shared memory 15 is provided in correspondence with a print job. In other words, when a plurality of print jobs are present, shared memories are provided within the RAM 1c for the respective print jobs. On the other hand, the control memory 16 stores therein control data for use in controlling writing/reading operation of a print command. As previously explained, in such a case that a plurality of shared memories 15 are provided, plural sets of control data are stored in the control memory 16 in correspondence with these plural shared memories, respectively. These control data are distinguished with respect to each of print jobs.

In this case, when one data stored in the shared memory 15 is read out, the shared memory 15 is featured to be released so that other data may be stored into such a memory area in which the first-mentioned data has been stored. This feature of the shared memory is different from the intermediate file which holds all of the print commands are stored until the job is ended.

As indicated in Fig. 3, for example, the control memory 16 stores thereinto a shared memory size M 16a; an

all write amount W 16b of the shared memory 15; an all read amount R 16c of the shared memory 15; a data amount (W-R) 16d saved in the shared memory 15; a read handle 16e indicative of data being accessed by the command transmitting unit 14; a write handle 16f representative of data being accessed by the print processing unit 12; a block ID 16g indicative of a block of a print command; an address 16h indicative of a position where this block is stored; another block ID 16i representative of a block of a print command; and further, an address 16j indicative of a position where this block is stored.

The memory size M 16a is written into the control memory 16 when the memory area of the shared memory 15 is set. It should also be noted that this memory size M 16a may be defined in a fixed manner and/or a dynamic manner. The all write amount W is equal to a value obtained by accumulatively summing write amounts after a print job is commenced and up to present time. The all read amount R is equal to a value obtained by accumulatively adding read amounts after a print job is commenced and up to present time. The data amount R corresponds to a difference between the all write amount W and the all read amount R, and indicates an amount of a print command being stored in the shared memory 15 at the present time. The read handle 16e is indicated by, for example, a block ID of a block being accessed by the command transmitting unit 14, or an

address of this block. The write handle 16f is represented by, for instance, a block ID of a block being accessed by the print processing unit 12, or an address of this block. The block ID 16g and the block ID 16i represent blocks
5 stored in the shared memory 15. A total number of the blocks is determined based upon both the storage capacity of the shared memory 15 and the dimensions of the blocks. In this first embodiment mode, it is so assumed that a plurality of blocks are stored. It should be understood
10 that the shared memory 15 does not always own such a sufficiently large memory capacity by which all of the produced print commands can be stored thereinto under such a state that all of these print commands are present therein at the same time. As a result, after a print
15 command of a certain block has been read out, this read block ID is invalidated, and then, a new block ID is rewritable into this storage area.

The print managing unit 11 secures the shared memory 15 having a preset memory capacity, or a user-set memory
20 capacity on the RAM 1c when, for example, the printing control apparatus 10 is turned ON, or is initiated by an application program. Upon receipt of a print request sent from the application program, this print managing unit 11 issues a print job. The print managing unit 11 sends this
25 print job to the print processing unit 12. At this time, as the above-explained various sorts of information related

to the print condition, for example, the memory size M and the address 16h where the first block is stored, are transferred from this print managing unit 11 to the print processing unit 12.

5 PRINTING PROCESS BY PRINT PROCESSING UNIT
 IN FIRST PRINTING CONTROL APPARATUS

Referring now to Fig. 4, a description will be made of a process operation of the print processing unit 12. The print processing unit 12 outputs print command data to
10 the shared memory 15 in accordance with the following process sequence. When a print job is transferred from the print managing unit 11 to the print processing unit 12, this print processing unit 12 executes an initial setting process operation so as to commence the print job (step 22).
15 In other words, both the memory size M and the first storage address, which are transferred from the print managing unit 11 in correspondence with the print job, are stored into the control memory 16, and also both the all write amount W and the all read amount R, which are saved
20 in the control memory 16, are set to initial values thereof, for example, "0" by this print processing unit 12.

Next, the print processing unit 12 judges as to whether or not the shared memory 15 owns an empty memory area, referring to the memory size M of the shared memory
25 15 and the data amount (W-R) of the shared memory 15 which are stored in the control memory 16 (step 24).

When there is no empty storage area in the shared memory 15, namely when $M-(W-R) = 0$ (namely "NO" at step 24), the print processing unit 12 stops the data output operation to the shared memory 15 until the shared memory
5 15 may have such an empty storage area (step 26). To the contrary, when the shared memory 15 owns the empty storage area, namely when $M-(W-R) > 0$ (namely "YES" at step 24), this print processing unit 12 executes a conversion process from print data to a print command, and further, stores the
10 converted print command into this empty storage area of the shared memory 15 (step 28). At the beginning, since $W = R = 0$, it becomes $M > 0$.

In this case, the storing is carried out for each of a preselected amount of these print commands. In this
15 specification, it should be understood that this preselected amount of print commands will be referred to as a "block". When the print commands for one block are written into the shared memory 15, the print processing unit 12 stores both the block ID thereof and the storage
20 address thereof into the control memory 16, as shown in Fig. 3. Then, the print processing unit 12 stores such a block ID indicative of the block which is presently being written into the write handle 16f.

Next, the print processing unit 12 adds an amount of
25 written data to the all write amount W 16b indicative of the all data which have been written so as to calculate a

new all write amount W. Then, the print processing unit 12 updates the all write amount 16b by this new all write amount W. At the same time, the print processing unit 12 calculates an all data amount (W-R) with reference to the all read amount R 16c stored in the control memory 16 in order to update the all data amount (W-R) 16d.

The process operations defined from the steps 24 to 29 are repeatedly carried out until an end of this print job is notified from the print managing unit 11 (namely "NO" at step 30). On the other hand, when the end of this print job is notified from the print managing unit 11 (namely "YES" at step 30), the print processing unit 12 executes a process operation required to complete the print job with respect to the control memory 16 (step 32). Then, the print processing unit 12 accomplishes the data output operation of the print command to the shared memory 15. As this process operation to complete the print job, for instance, the write handle 16f is set to 0.

COMMAND PROCESSING OPERATION BY COMMAND TRANSMITTING UNIT

IN FIRST PRINTING CONTROL APPARATUS

Referring now to a flow chart of Fig. 5, a process sequence of the command transmitting unit 14 will be described.

Upon receipt of an instruction for sending a print command from the print managing unit 11, the command transmitting unit 14 starts to read the print command from

the shared memory 15.

First, the command transmitting unit 14 judges as to whether or not a print command to be read is present in the shared memory 15 with reference to the data amount (W-R) 5 16d within this shared memory 15 in the control memory 16 (step 40). In the case that the print command to be read is present in the shared memory 15, that is, when $W-R > 0$ ("YES" at step 40), the command transmitting unit 14 reads the print command from the shared memory 15 (step 42), and 10 copies this read print command into a buffer (not shown) at a step 43. Thereafter, such a memory area where the copied print command has been stored in the shared memory 15 is brought into a rewritable condition (step 44).

Subsequently, the command transmitting unit 14 sequentially 15 transmits the print commands to the spooler 17 (step 46).

In this case, as the process operation defined at the step 44, for instance, the following process operation is carried out. That is to say, the command transmitting unit 14 invalidates a block ID as to the read block, and 20 also rewrites the read handle into a block ID which should be subsequently read. Furthermore, the command transmitting unit 14 adds a data amount of the read block to the all read amount R, and calculates a data amount (W-R). Then, the command transmitting unit 14 stores the 25 respective data amounts into the relevant storage areas 16c and 16d of the control memory 16 shown in Fig. 3, and

updates these data amounts. As a result, rewritable areas may be newly secured in the shared memory 15.

The above-explained process operations defined from the steps 40 to 46 are repeatedly carried out until the
5 print job is ended (step 48).

It should also be noted that both the above-explained process operation by the print processing unit 12 and the process operation by the command transmitting unit 14 are independently executed in a parallel manner. In
10 this case, the process speed of the latter-mentioned process operation depends upon the data transfer speed to the printing apparatus. As a result, it is conceivable that the storage capacity of the shared memory 15 is set based upon the data transfer speed to the printing
15 apparatus.

Concretely speaking, where the data transfer speed to the printing apparatus is high, since the data read speed from the shared memory 15 by the command transmitting unit 14 is similarly high and the storage capacity of the
20 shared memory 15 may be increased. On the other hand, where the data transfer speed to the printing apparatus is low, the data read speed from the shared memory 15 by the command transmitting unit 14 is also low. In this case, the storage capacity of the shared memory 15 may be
25 decreased and a RAM storage area to be used to execute the process other than the shared memory 15 may be increased.

As a result, the overall efficiency of the printing system can be increased.

The data transfer speed to the printing apparatus may be predicted based upon a sort of a port. Concretely speaking, the data transfer speeds are increased in this order of a serial port, a parallel port, a USB port, and a 1394 port. As a consequence, the storage capacity of the shared memory 15 may be set in accordance with a user instruction, depending upon a sort of a used port. Also, the storage capacity of the shared memory 15 may be determined by automatically judging a used port.

As explained above, the data storage area in which the transmitted print command has been stored is released to allow new data to be rewritten in the shared memory 15. As a result of this, the printing operation can be carried out without storing the intermediate file comprised of a series of print commands into the hard disk drive. Therefore, the highspeed data access operation can be realized. Also, the used storage amount of the hard disk drive can be reduced. More specifically, assuming now that 6 colors are used per 1 pixel, $2 \text{ bit/dot} \times 6 = 12 \text{ bits}$ are required in order to represent one pixel, and further assuming that both resolution in a longitudinal direction of an A4-sized paper (namely $8 \times 11 \text{ inches}$) and resolution in a transverse direction thereof are selected to be 720 dpi, respectively, a hard disk storage area of $2 \times 6 \times 8 \times$

11 × 720 × 720 = 547 megabits (68 Mbytes) per one sheet of A4-sized paper is required. A memory area having a small storage capacity is secured as a shared memory space and a hard disk storage area of (68 Mbytes) × (total sheet number
5 of A4-sized paper) can be reduced.

In accordance with the printing system of this first embodiment mode, the print command is stored into the shared memory whose access time is generally short, while such a print command is not stored into the hard disk drive
10 whose access time is generally long. As a result, since a total number of accessing operations to the hard disk drive is reduced, the printing speed can be increased.

ARRANGEMENT OF SECOND PRINTING CONTROL APPARATUS

Referring now to drawings, a printing control
15 apparatus according to a second embodiment mode of the present invention will be described. This second embodiment mode may be realized by employing a similar hardware resource to that of the above-explained first embodiment mode.

20 This second embodiment mode may be realized in such a manner that the host computer 1 reads a printing control program. As indicated in Fig. 2, a printing control apparatus, according to this second embodiment mode, is equipped with a print managing unit 11 for issuing a print
25 job upon receipt of a print request sent from an application program (AP); a print processing unit 12 for

performing such a process operation that print data to be printed out is produced and also this produced print data is converted into a print command having a specific format to a printing apparatus; a shared memory 15 formed within a RAM 1c for temporarily storing therein the print command, and a command transmitting unit 14 for executing such a process operation that the print command stored in the shared memory 15 is read and this read print command is transmitted to the printing apparatus. This printing control apparatus is further arranged by a control memory 16 for controlling read/write operations of the print command in the shared memory 15; a spooler 17 for transferring a print command transmitted from the command transmitting unit 14 to a spool file 18; and a despooler 19 for reading the print data spool-processed into the spool file 18 at proper timing and for transferring the read print data to the printing apparatus. As previously explained, a major functional arrangement of this second embodiment mode is similar to that shown in Fig. 2. As a consequence, different points will be explained in this second embodiment mode.

As indicated in Fig. 6, the control memory 16 stores therein a shared memory size M 16a; an all write amount W 16b of the shared memory 15; an all read amount R 16c of the shared memory 15; a data amount (W-R) 16d saved in the shared memory 15; a read handle 16e indicative of data

being accessed by the command transmitting unit 14; a write handle 16f representative of data being accessed by the print processing unit 12; a block ID 16g indicative of a block of a print command; an address 16h indicative of a position where this block is stored; another block ID 16i representative of a block of a print command; an address 16j indicative of a position where this block is stored; a threshold value $\alpha 16x$ of an occupation ratio; another threshold value $\beta 16y$ thereof; and a job end command flag 16z. The threshold values $\alpha 16x$ and $\beta 16y$ correspond to threshold values for ratios of data amounts written in the shared memory 15 to the memory capacity M. In this second embodiment mode, a ratio of a data amount stored in the shared memory 15 to a size of the shared memory 15 is controlled within a predetermined range.

It should be understood that in the above-explained arrangement, the print processing unit 12 may function as a first stopping means for stopping a write operation of a print command in addition to the previously-described functions realized in the first embodiment mode. Also, the command transmitting unit 14 may function as a second stopping means for stopping a read operation of a print command in addition to the previously-explained functions realized in the first embodiment mode.

Also, in the above-explained arrangement, the ratio of the data amount written into the shared memory 15 to the

memory capacity M is employed as an index used to grasp a storage condition of data in the shared memory 15. However, the present invention is not limited to this. For instance, a data amount may be indicated by an absolute amount.

5 PRINTING PROCESS BY PRINT PROCESSING UNIT
 IN SECOND PRINTING CONTROL APPARATUS

Upon receipt of such an instruction from the print managing unit 11 that a print command be produced, the print processing unit 12 is operated as follows.

10 Referring now to Fig. 7, a description will be made of a process operation of the print processing unit 12. The print processing unit 12 outputs print command data to the shared memory 15 in accordance with the following process sequence. When a print job is transferred from the
15 print managing unit 11 to the print processing unit 12, this print processing unit 12 executes an initial setting process operation so as to commence the print job in a similar manner to the first embodiment mode. Also, this print processing unit 12 initializes the job end command
20 flag 16z of the control memory 16 (step 222).

Next, the print processing unit 12 calculates $K = (W-R)/M$ with reference to the shared memory size M 16a in the control memory 16, and the data amount (W-R) 16d within the shared memory 15 (step 223). Then, the print
25 processing unit 12 compares the resultant "K" with the threshold value "α" of the occupation ratio within the

control memory 16 shown in Fig. 6. In this second embodiment mode, this threshold value " α " is set to $\alpha = 0.8$. As a result, the print processing unit 12 judges as to whether or not $K > 0.8$. In other words, the print
5 processing unit 12 judges as to whether or not the data amount within the shared memory 15 exceeds 80 percents of the shared memory size (step 224). In this second embodiment mode, the threshold value " α " of the K value in the print processing unit 12 is set to 0.8. However, this
10 set threshold value is one of the typical threshold values. The threshold value may be set to any arbitrary positive value smaller than 1.

When the value of K is larger than, or equal to 0.8, namely when the data amount within the shared memory 15 is
15 larger than, or equal to 80 percents of the memory size M of the shared memory 15 ("NO" at step 224), the print processing unit 12 stops the data output operation to the shared memory 15 until the data amount within the shared memory 15 becomes smaller than 80 percents of the memory
20 size M of this shared memory 15 (step 226). On the other hand, when the value of K is smaller than 0.8, namely when the data amount within the shared memory 15 is smaller than 80 percents of the memory size M of the shared memory 15 (YES at step 224), this print processing unit 12 executes a
25 process operation for converting print data into a print command, and also stores the converted print command into

an empty area of the shared memory 15 (step 228). Similar to the first embodiment mode, the print processing unit 12 executes an update process operation of the all write amount W, and also calculates a data amount (W-R) so as to
5 update the relevant data of the control memory 16 (step 229).

The process operations defined from the steps 223 to 229 are repeatedly carried out until an end of this print job is notified from the print managing unit 11 (namely
10 "NO" at step 230). On the other hand, when the end of this print job is notified from the print managing unit 11 (namely "YES" at step 230), the print processing unit 12 executes a process operation required to complete the print job and sets the job end command flag 16z with respect to
15 the control memory 16 (step 232). Then, the print processing unit 12 accomplishes the data output operation of the print command to the shared memory 15. As this process operation to complete the print job, for instance, the read handle 16e is set to 0.

20 COMMAND PROCESSING OPERATION BY COMMAND TRANSMITTING UNIT

IN SECOND PRINTING CONTROL APPARATUS

Referring now to a flow chart shown in Fig. 8, a process sequence of the command transmitting unit 14 will be explained.

25 First, the command transmitting unit 14 judges as to whether or not a print command to be read is present in the

shared memory 15, referring to the data amount (W-R) 16d within this shared memory 15 in the control memory 16 (step 240). In the case that the print command to be read is present in the shared memory 15, that is, when $W-R > 0$ ("YES" at step 240), the command transmitting unit 14 calculates $K = (W-R)/M$ with reference to both the shared memory size M 16a within the control memory 16 and also the data amount (W-R) 16d within the shared memory 15 (step 241). Then, the command transmitting unit 14 compares the resultant K value with the threshold value β . In this second embodiment mode, the command transmitting unit 14 judges as to whether or not $K > 0.6$. In other words, the command transmitting unit 14 judges as to whether or not the data amount within the shared memory 15 exceeds 60 percents of the shared memory size (step 242). In this second embodiment mode, the threshold value " β " of the K value in the command transmitting unit 14 is set to 0.6. However, this set threshold value is one of the typical threshold values. The threshold value β may be set to any arbitrary positive value smaller than the threshold value α of K (0.8 in second embodiment mode) used in the print processing unit 12.

When the value of K is smaller than, or equal to 0.6, namely when the data amount within the shared memory 15 is smaller than, or equal to 60 percents of the shared memory size M ("NO" at step 242), the command transmitting unit 14

judges as to whether or not the job end command flag 16z is set with reference to the control memory 16 (step 243). In such a case that the job end command flag 16z is not set ("NO" at step 243), the command transmitting unit 14 stops
5 reading of the print command from the shared memory 15 until the data amount within the shared memory 15 becomes larger than 60 percents of the shared memory size M (step 244).

As previously described, since the process
10 operations defined at the step 224 (NO), the step 226, the step 242 (NO), and the step 244 are carried out, the command transmitting unit 14 executes the control operation in order that the value of K becomes larger than 0.6 and becomes smaller than 0.8, namely the data amount within the
15 shared memory 15 becomes larger than 60 percents of the shared memory size and also becomes smaller than 80 percents thereof. As a result, it can be avoided such a fact that the occupation ratio of the CPU 1a is concentrated to the process operation with respect to the
20 shared memory 15, and the CPU resource can be allocated to the respective modules of the printer driver, and the application programs and OS (operating system) other than this printer driver. As a result, the loads can be properly distributed.

25 On the other hand, when the value of K is larger than 0.6, namely when the data amount within the shared

memory 15 is larger than 60 percents of the shared memory size M ("YES" at step 242), or in the case that the job end command flag 16z is set ("YES" at step 243), namely in such a case that even if the data amount within the shared

5 memory 15 is smaller than, or equal to 60% of the shared memory size, then the print job is ended, the command transmitting unit 14 reads out the print command from the shared memory 15 (step 245), and copies this read print command into a buffer (not shown) at a step 246.

10 Thereafter, such a memory area where the copied print command has been stored in the shared memory 15 is brought into a rewritable condition (step 247). Subsequently, the command transmitting unit 14 sequentially transmits the print commands to the spooler 17 (step 248). The process

15 operations defined from the step 240 to the step 248 are repeatedly carried out until the print job is ended (step 249).

ARRANGEMENT/OPERATION OF THIRD PRINTING CONTROL APPARATUS

Fig. 9 is a structural diagram for showing a major

20 unit of a printing control apparatus according to a third embodiment mode of the present invention. In the printing control apparatus of this third embodiment mode, the write/read control operations into/from the shared memory 15, which have been processed by the print processing unit

25 12 and the command transmitting unit 14 in the first and second embodiment modes, are carried out by another memory

managing unit 22.

That is, in this third embodiment mode, the print processing unit 12 mainly performs a converting operation from a print image to a print command, and also a writing operation of a print command into the shared memory 15. The command transmitting unit 14 mainly reads a print command from the shared memory 15, copies a print command to a buffer, and transmits a read print command.

ARRANGEMENT OF FOURTH PRINTING CONTROL APPARATUS

Referring now to drawings, a printing control apparatus according to a fourth embodiment mode of the present invention will be described. This fourth embodiment mode may be realized by employing a similar hardware resource to that of the above-explained first embodiment mode.

This fourth embodiment mode may be realized in such a manner that the host computer 1 reads a printing control program. As indicated in Fig. 10, a basic arrangement of a printing control apparatus, according to this fourth embodiment mode, is similar to that of the printing control apparatus shown in Fig. 2. That is to say, this fourth printing control apparatus contains a print managing unit 11, a print processing unit 12, a shared memory 15, a command transmitting unit 14, a spooler 17, a spooler file 18, and a despooler 19. The arrangements of these units are similar to those of Fig. 2. On the other hand, this

fourth printing control apparatus owns such a different structure from those of the first and second embodiment modes, in that it comprises a first control memory 20 and a second control memory 21. The first control memory 20
5 controls read/write operations of a print command from/into the shared memory 15. The second control memory 21 controls read/write operations of a print command from/into the spool file 18. In the following, this structural difference will mainly be explained.

10 As indicated in Fig. 11, the first control memory 20 stores thereinto data at storage areas 20a to 20z. These stored data are identical to those shown in Fig. 6. It should be understood that suffixes are attached to these data in order to be discriminated from those of the second
15 control memory 21, for example, a shared memory size M1.

Similarly, as indicated in Fig. 12, in the second control memory 21, the following data are stored in storage areas 21a to 21z: i.e., an allowed capacity M2 (for example, same memory size as shared memory 15) which is set when a
20 printing operation is commenced; an all write amount W2 of the spool file 18 (present spool file size); an all read amount R2 of the spool file 18 (amount of transmitted data); an amount of not-yet transmitted data (W2-R2) within the spool file 18; a read handle indicative of data to
25 which the spooler 17 accesses; a write handle indicative of data to which the despooler 19 accesses; a block ID

indicative of a block of a print command and an address of this block; a threshold value " α_2 " of an occupation ratio; and a job end command flag. This threshold value α_2 corresponds to a threshold value of a ratio of a data
5 amount written in the spool file 18 to the file capacity M2. Similarly, suffixes 2 are attached to these data, as shown in Fig. 12.

In this fourth embodiment mode, the printing process unit 12 corresponds to both a means for converting a print
10 image into a print command and for storing the converted print command into the shared memory, and a first stopping means (which will be discussed later). Also, the command transmitting unit 14 corresponds to a means for reading a print command, a means for storing the print command, a
15 first stopping means, and a second stopping means.

PRINTING PROCESS BY PRINT PROCESSING UNIT

IN FOURTH PRINTING CONTROL APPARATUS

Referring now to Fig. 13, a description will be made of a process operation of the print processing unit 12.
20 The print processing unit 12 outputs print command data to the shared memory 15 in accordance with the following process sequence. When a print job is entered from the print managing unit 11 to the print processing unit 12, this print processing unit 12 first executes an initial
25 setting process operation so as to commence the print job as in the first embodiment mode. Also, this print

processing unit 12 initializes the job end command flag of the first control memory 20 (step 452).

Next, the print processing unit 12 calculates $K1 = (W1 - R1) / M1$, referring to the shared memory size $M1$ in the first control memory 20, and the data amount $(W1 - R1)$ within the shared memory 15 (step 453). Then, the print processing unit 12 judges as to whether or not $K1 > 0.8$. In other words, the print processing unit 12 judges as to whether or not the data amount within the shared memory 15 exceeds 80 percents of the shared memory size (step 454). In this fourth embodiment mode, the threshold value " $\alpha 1$ " of the $K1$ value in the print processing unit 12 is set to 0.8. However, this set threshold value $\alpha 1$ is one of the typical threshold values. The threshold value $\alpha 1$ may be set to any arbitrary positive value smaller than 1.

When the value of K is larger than, or equal to 0.8, namely when the data amount within the shared memory 15 is larger than, or equal to 80 percents of the memory size of the shared memory 15 ("NO" at step 454), the print processing unit 12 stops the data output operation to the shared memory 15 until the data amount within the shared memory 15 becomes smaller than 80 percents of the memory size of this shared memory 15 (step 456). On the other hand, when the value of $K1$ is smaller than 0.8, namely when the data amount within the shared memory 15 is smaller than 80 percents of the memory size of the shared memory 15 (YES

at step 454), this print processing unit 12 executes a process operation for converting print data into a print command, and also stores the converted print command into an empty area of the shared memory 15 (step 458).

5 Similar to other embodiment modes, the print processing unit 12 executes an update process operation of the all write amount W1, and also calculates a data amount (W1-R1). Then the print processing unit 12 stores the calculation result into the relevant storage area of the first control memory 20 so as to update the stored data (step 459).

 The process operations defined from the step 454 to the step 459 are repeatedly carried out until an end of this print job is notified from the print managing unit 11 (namely "NO" at step 460). On the other hand, when the end of this print job is notified from the print managing unit 11 (namely "YES" at step 460), the print processing unit 12 executes a process operation required to complete the print job, and sets the job end command flag of the first control memory 20 (step 462). Then, the print processing unit 12 accomplishes the data output operation of the print command to the shared memory 15.

COMMAND PROCESSING OPERATION BY COMMAND TRANSMITTING UNIT

IN FOURTH PRINTING CONTROL APPARATUS

25 Referring now to a flow chart shown in Fig. 14, a process sequence of the command transmitting unit 14 will

be explained.

First, the command transmitting unit 14 judges as to whether or not a print command to be read is present in the shared memory 15, referring to the data amount (W1-R1) 20d
5 within this shared memory 15 in the first control memory 20 shown in Fig. 11 (step 470).

In the case where the print command to be read is present in the shared memory 15, that is, when $W1-R1 > 0$ ("YES" at step 470), the command transmitting unit 14
10 calculates $K2 = (W2-R2)/M2$, referring to both the allowed capacity M2 within the second control memory 21 and also the data amount of the not-yet-transmitted data (W2-R2) within the spool file 18 (step 471). Then, the command transmitting unit 14 judges as to whether or not $K2 < 0.8$.
15 In other words, the command transmitting unit 14 judges as to whether or not the data amount of the not-yet-transmitted data in the spool file 18 exceeds 80 percents of the allowed capacity M2 (step 472). In this fourth embodiment mode, the threshold value " $\alpha 2$ " of the K2 value
20 in the command transmitting unit 14 is set to 0.8. However, this set threshold value " $\alpha 2$ " is one of the typical threshold values. The threshold value " $\alpha 2$ " may be set to any arbitrary positive value smaller than 1.

When the value of K2 is larger than, or equal to 0.8,
25 namely when the data amount of the not-yet-transmitted data within the spool file 18 is larger than, or equal to 80

percents of the allowed capacity M2 ("NO" at step 472), the command transmitting unit 14 stops transmitting of the print command to the spooler 17 until the data amount of the not-yet-transmitted data within the spool file 18 becomes smaller than 80 percents of the allowed capacity M2 (step 472a). As previously described, the command transmitting unit 14 executes the command transmission control operation to the spooler 17 so that the value of K2 becomes smaller than 0.8, or the not-yet-transmitted data in the spool file 18 becomes smaller than 80 percents thereof. As a result, it can be avoided that the occupation ratio of the CPU 1a is concentrated to the process operation with respect to the command transmission to the spooler 17, and the CPU resource can be allocated to the respective modules of the printer driver, and the application programs and OS (operating system) other than this printer driver. As a result, the loads can be properly distributed.

On the other hand, when the value of K2 is smaller than 0.8, namely the data amount of the not-yet-transmitted data within the spool file 18 is smaller than 80 percents of the allowed capacity M2 (YES at step 472), the command transmitting unit 14 calculates $K1 = (W1 - R1) / M$, referring to both the shared memory size M1 within the first control memory 20 and also the data amount (W1-R1) 20d within the shared memory 15 (step 473). Then, the command

transmitting unit 14 judges as to whether or not $K1 > 0.6$.
In other words, the command transmitting unit 14 judges as
to whether or not the data amount within the shared memory
15 exceeds 60 percents of the shared memory size (step 474).
5 In this fourth embodiment mode, the threshold value " $\beta 1$ " of
the $K1$ value in the command transmitting unit 14 is set to
0.6. However, this set threshold value is one of the
typical threshold values. The threshold value $\beta 1$ may be
set to any arbitrary positive value smaller than the
10 threshold value $\alpha 1$ of $K1$ (0.8 in fourth embodiment mode)
used in the print processing unit 12.

When the value of $K1$ is smaller than, or equal to
0.6, namely when the data amount within the shared memory
15 is smaller than, or equal to 60 percents of the shared
memory size M ("NO" at step 473), the command transmitting
unit 14 judges as to whether or not the job end command
flag 16z is set, referring to the first control memory 20
(step 475). In such a case that the job end command flag
16z is not yet set ("NO" at step 475), the command
20 transmitting unit 14 stops reading of the print command
from the shared memory 15 until the data amount within the
shared memory 15 becomes larger than 60 percents of the
shared memory size $M1$ (step 475a).

As previously described, since the process
25 operations defined at the step 454 (NO) and the step 456
shown in Fig. 13, the step 474 (NO) and the step 475a shown

in Fig. 14 are carried out, the command transmitting unit 14 executes the control operation so that the value of K1 becomes larger than 0.6 and becomes smaller than 0.8, namely the data amount within the shared memory 15 becomes
5 larger than 60 percents of the shared memory size and also becomes smaller than 80 percents thereof. As a result, it can be avoided such a fact that the occupation ratio of the CPU 1a is concentrated to the process operation with respect to the shared memory 15, and the CPU resource can
10 be allocated to the respective modules of the printer driver, and the application programs and OS (operating system) other than this printer driver. As a result, the loads can be properly distributed.

On the other hand, when the value of K1 is larger
15 than 0.6, namely when the data amount within the shared memory 15 is larger than 60 percents of the shared memory size M ("YES" at step 472), or in the case that the job end command flag 16z is set ("YES" at step 475), namely in such a case that even if the data amount within the shared
20 memory 15 is smaller than, or equal to 60% of the shared memory size, then the print job is ended, the command transmitting unit 14 reads out the print command from the shared memory 15 (step 476), and copies this read print command into a buffer (not shown) at a step 477.
25 Thereafter, such a memory area where the copied print command has been stored in the shared memory 15 is brought

into a rewritable condition (step 478). Subsequently, the command transmitting unit 14 sequentially transmits the print commands to the spooler 17 (step 479). The process operations defined from the step 470 to the step 479 are
5 repeatedly carried out until the print job is ended (step 480).

It should also be noted that as previously explained in the first embodiment mode, the storage capacity of the shared memory 15 may be preferably set based upon the data
10 transfer speed to the printing apparatus in this fourth embodiment mode.

ARRANGEMENT OF FIFTH PRINTING CONTROL APPARATUS

Referring now to drawings, a printing control apparatus 10 according to a fifth embodiment mode of the present invention will be described. This printing control
15 apparatus of the fifth embodiment mode comprises employing an intermediate file. In this printing control apparatus 10 when plural sheets of one same page are printed out, both a shared memory and the intermediate file are used in
20 combination.

As indicated in Fig. 15, the printing control apparatus 10 of this fifth embodiment mode is realized by adding an intermediate file 13 to the above-explained printing control apparatus shown in Fig. 2. In this fifth
25 embodiment mode, the intermediate file 13 is constituted in, for example, a hard disk 3. Then, this intermediate file

13 owns a larger storage capacity than that of the shared memory 15.

Various sorts of data indicated in Fig. 17 are stored into a control memory 16 in addition to the previously-explained data shown in Fig. 3. The data shown in Fig. 17 has storage destination information indicating that a print command in unit of a page is saved in which device, i.e., either the intermediate file 13 or the shared memory 15. This storage destination information is determined by a print managing unit 11.

For instance, when the printing control apparatus 10 is initiated, the print managing unit 11 secures shared memory 15 having a preset storage capacity or a user-set storage capacity on a RAM 1c. Then, upon receipt of a print command from an application program, the print managing unit 11 issues a print job, and thereafter transmits this print job to a print processing unit 12. In this case, as the various sorts of information related to the above-explained print condition, for instance, the memory size M and the address 16h at which the first block, should be stored, shown in Fig. 3, are transferred to the print processing unit 12.

PRINTING OPERATION BY FIFTH PRINTING CONTROL APPARATUS

Next, printing operation by the printing control apparatus 10 according to this fifth embodiment mode will now be described.

As indicated in a flow chart of Fig. 16, upon receipt of a print instruction made from an application program, the print managing unit 11 checks which type of printing operation this print instruction corresponds to. In other words, the print managing unit 11 judges as to whether only one sheet copy is required, or plural sheets of copies are required (step 511). If this print instruction requests one sheet copy, the print managing unit 11 instructs the print processing unit 12 to output a print command to the shared memory 15 (step 512). At this time, as previously explained with reference to Fig. 4, the print processing unit 12 stores the print condition information such as the memory size M in the memory 16 prior to the printing operation. Thereafter, the print processing unit 12 executes such a process operation that the shared memory 15 temporarily stores the print command in a similar manner to that of the previously explained other embodiment modes. Therefore, detailed descriptions thereof are omitted here.

On the other hand, when plural sheets of copies are requested, the print managing unit 11 checks as to whether or not all pages can be stored into the intermediate file 13 (step 513). Concretely speaking, the print managing unit 11 executes this judgment in accordance with the following manner. That is, this print managing unit 11 interrogates the operating system (OS) so as to acquire a

dimension of a storage area on the hard disk drive, which is allocated in order to store this print command, and also investigate a data amount of the print data sent from the application program. If all pages can be stored into the intermediate file 13, the print managing unit 11 instructs the print processing unit 12 to output a print command to the intermediate file 13 (step 514).

As indicated in Fig. 18, after the print processing unit 12 converts a print image into a print command, the print processing unit 12 stores the produced print command into the intermediate file 13 (step 521). In this case, plural sheets of the same one page are printed out, and therefore, plural sets of printed matters are required to be produced. However, since all of the print commands are saved in the intermediate file 13 until the print job is ended, only one set of such print commands are stored in this intermediate file 13.

Also, the print processing unit 12 monitors as to whether or not the print job is accomplished (step 522). The producing operation and the storage operation of the print image are repeatedly carried out until the print job is ended. On the other hand, when the print job is ended, the print processing unit 12 notifies to the print managing unit 11 that the print commands have been converted and have been stored into the intermediate file 13 by outputting an end command (step 523).

Next, if it is judged that only portions of these print commands may be saved in the intermediate file 13 ("NO" at step 513), the print managing unit 11 designates a storage destination in unit of a page as to the print job
5 (step 515). This designation of the storage destination may be carried out by, for example, forming such a table as shown in Fig. 17. The formed table is stored into a control memory 16. As shown in Fig. 17, page IDs combined with storage destinations are stored in this control memory
10 16. For example, the following destinations may be made: a first page-intermediate file; a second page-intermediate file; and a third page-shared memory. This information is utilized where that the command transmitting unit reads the command.

15 The print processing unit 12 executes a converting process operation to a print command as to the print job sent from the print managing unit 11, and then, determines as to whether this converted print command is to be outputted to the intermediate file 13 or the shaped memory
20 15, referring to the storage destination information (shown in Fig. 17) stored in the control memory 16. When this storage destination information indicates the intermediate file 13, the print processing unit 12 transmits this print command to the intermediate file 13. On the other hand,
25 when the storage destination information indicates the shared memory 15, the print processing unit 12 stores the

print command into the shared memory 15 in accordance with the previously explained sequence shown in Fig. 4. In this case, the print processing unit 12 refers to the data indicated in Fig. 3.

5 COMMAND PROCESSING OPERATION BY COMMAND TRANSMITTING UNIT
 IN FIFTH PRINTING CONTROL APPARATUS

Referring now to a flow chart of Fig. 19, a process sequence of the command transmitting unit 14 will be described.

10 The command transmitting unit 14 accepts a command transmission instruction containing an instruction for instructing which pages are to be read in what order from the print managing unit 11. First, the command transmitting unit 14 judges as to whether or not a relevant
15 file is present in the intermediate file 13 (step 670). In the case that the print command to be transmitted is present in the intermediate file 13, the command transmitting unit 14 reads the print command from the intermediate file 13 (step 674), copies this read print
20 command into a buffer (not shown) and then transmits the print command at a step 676. At this time, the command transmitting unit 14 checks as to whether or not the print command is to be read out from the shared memory 15 (step 678). This checking result may be obtained by
25 investigating the control memory 16. In other words, when $(W-R) > 0$ in the shared memory 15, it can be seen that the

print command to be read is present in the shared memory 15. Similarly, as indicated in Fig. 16, the above-described judgment can be made by checking as to whether the print managing unit 11 instructs that the print command be
5 outputted to the intermediate file 13, or both to the intermediate file 13 and the shared memory 15. Furthermore, this judgment may be made by referring to the storage destination information shown in Fig. 17.

The process operations defined from the step 674 to
10 the step 679 are repeatedly carried out until all of the print commands stored in the intermediate file 13 are read out. When all of these print commands have been read out, the print job is accomplished (step 679).

On the other hand, process operations defined from a
15 step 680 to a step 685 are executed in accordance with the same sequential operation to that shown in Fig. 5. Descriptions thereof are omitted here. It should also be noted that since the print command may be written into the shared memory 15 when the shared memory 15 is designated,
20 the print job is accomplished after the print command has been written and the reading operation of the print command to be read is completed (step 635).

Also, in this fifth embodiment mode, the storage capacity of the shared memory 15 may be set based upon the
25 data transfer speed to the printing apparatus.

Further, in this fifth embodiment mode, the command

transmitting unit 14 judges as to whether the print command is stored in the intermediate file or the shared memory, in the unit of the page. However, the present invention is not limited thereto. For example, the command transmitting
5 unit 14 may judge as to whether the print command is stored in the intermediate file or the shared memory, in a smaller unit than the page unit, e.g., in unit of a block.

Moreover, also in this fifth embodiment mode, the memory managing unit as indicated in Fig. 9 may be employed
10 so that this memory managing unit may control the read/write operations from/into the shared memory by both the print processing unit 12 and the command transmitting unit 14.

In accordance with this fifth embodiment mode, a
15 print commands are stored, as many as possible, into the storageable area of the intermediate file in the hard disc. Therefore, when the copy printing operation is carried out, as to the print command formed in the intermediate file, the print commands are read out from the intermediate file
20 plural times equal to a total number of command copies to execute the printing operation instead of the following command conversions. That is, the print data is converted into the print command having such a specific format to the printing apparatus plural times equal to a total number of
25 command copies. In general, a reading speed of a print command from an intermediate file is faster than a

converting speed from print data to a print command.

Therefore, when a copy printing operation is carried out, a printing speed can be increased by forming such an intermediate file.

5 In addition, in accordance with this fifth embodiment mode, this printing control operation thereof may be similarly applied to such a print command that a print job is large and an intermediate file cannot be formed. In other words, similar to the first embodiment
10 mode, since the printing operation can be executed by employing the intermediate memory, even when a large-sized print is made, the printing operation is not interrupted in a half way.

 According to the present invention, even when an
15 amount of print commands is large, the print commands can be stored in a storage area having a small capacity. Furthermore, according to the present invention, printing control which hardly causes interruption of the printing in a half way, is realized.

WHAT IS CLAIMED IS:

- 1 1. A computer readable recording medium recording
2 thereon a program, which causes a computer to execute:
3 a process operation for storing a print command
4 converted from print data into a memory;
5 a process operation for reading the stored print
6 command to transmit the read print command to a printing
7 apparatus; and
8 a process operation for rendering a storage area of
9 said memory where said print command has been stored,
10 rewritable when said print command is read out.
- 1 2. A recording medium as claimed in claim 1 wherein:
2 said recording medium records thereon a program for
3 causing said computer to execute a process operation by
4 which data for controlling read/write operation of a print
5 command to said memory is produced, and said control data
6 is stored into another storage area of said memory.
- 1 3. A recording medium as claimed in claim 2 wherein:
2 said recording medium records thereon a program
3 containing a size of said memory and a data amount
4 presently stored in said memory as said control data.
- 1 4. A recording medium as claimed in claim 2 wherein:

2 said recording medium records thereon a program
3 containing information indicative of a position within said
4 memory where said print command is stored as said control
5 data.

1 5. A recording medium as claimed in claim 1 wherein:
2 said recording medium records thereon a program for
3 causing the computer to further execute;
4 a process operation for acquiring an index
5 indicative of a stored amount of said print command within
6 said memory; and
7 a process operation for stopping a process operation
8 for storing said print command into the memory when said
9 index is larger than, or equal to a first preset threshold
10 value.

1 6. A recording medium as claimed in claim 5 wherein:
2 said recording medium records thereon a program for
3 causing the computer further to execute:
4 a process operation for stopping a process operation
5 for reading said stored print command when said index is
6 smaller than, or equal to a second preset threshold value.

1 7. A recording medium as claimed in claim 1 wherein:
2 said recording medium records thereon a program for
3 causing the computer to further execute:

4 a process operation for acquiring an index
5 indicative of a stored amount of said print command within
6 said memory; and

7 a process operation for stopping a process operation
8 for reading said stored print command when said index is
9 smaller than, or equal to a second preset threshold value.

1 8. A recording medium as claimed in claim 1 wherein:

2 said recording medium records thereon a program for
3 causing the computer further to execute:

4 a process operation for storing said converted print
5 command into a file having such a nature that a print
6 command is saved until a print job is ended, when a print
7 job contains an instruction for printing plural sheets of
8 the same page.

1 9. A recording medium as claimed in claim 8 wherein:

2 said recording medium records thereon a program for
3 causing the computer further to execute:

4 a process operation for storing, when said print
5 command cannot be saved in said file, the not-yet-saved
6 print command into said memory.

1 10. A printing control method for controlling writing
2 and transmitting of a print command, which comprises:

3 a process operation for storing a print command

4 converted from print data into a memory;

5 a process operation for reading the stored print
6 command to transmit the read print command to a printing
7 apparatus; and

8 a process operation executed for rendering a storage
9 area of said memory where said print command has been
10 stored rewritable when a print command is read out.

1 11. A printing control method as claimed in claim 10
2 which further comprises:

3 a process operation for acquiring an index
4 indicative of a stored amount of said print command within
5 said memory; and

6 a process operation for stopping, when said index is
7 larger than, or equal to a first preset threshold value,
8 such a process operation for storing said print command
9 into the memory.

1 12. A printing control method as claimed in claim 11
2 which further comprises:

3 a process operation for stopping, when said index is
4 smaller than, or equal to a second preset threshold value,
5 such a process operation for reading said stored print
6 command.

1 13. A printing control method as claimed in claim 10

2 which further comprises:

3 a process operation for storing, when a print job
4 contains an instruction for printing plural sheets of the
5 same page, said converted print command into a file having
6 such a nature that a print command is saved until a print
7 job is ended.

1 14. A printing control method as claimed in claim 13
2 which further comprises:

3 a process operation for storing, when said print
4 command cannot be saved in said file, said not-yet-saved
5 print command into said memory.

1 15. A printing control apparatus for controlling
2 writing/transmitting operations of a print command,
3 comprising:

4 means which stores a print command converted from
5 print data into a memory;

6 means which reads the stored print command to
7 transmit the read print command to a printing apparatus;
8 and

9 means which renders, when a print command is read
10 out, the storage area of said memory where said print
11 command has been stored rewritable.

1 16. A printing control apparatus as claimed in claim 15,

2 further comprising:

3 means which acquires an index indicative of a stored
4 amount of said print command within said memory; and

5 means which stops, when said index is larger than,
6 or equal to a first preset threshold value, such a process
7 operation for storing said print command into the memory.

1 17. A printing control apparatus as claimed in claim 16,
2 further comprising:

3 means which stops, when said index is smaller than,
4 or equal to a second preset threshold value, such a process
5 operation for reading said stored print command.

1 18. A printing control apparatus as claimed in claim 15,
2 further comprising:

3 means which stores, when a print job contains an
4 instruction for printing plural sheets of the same page,
5 said converted print command into a file having such a
6 nature that a print command is saved until a print job is
7 ended.

1 19. A printing control apparatus as claimed in claim 18,
2 further comprising:

3 means which stores, when said print command cannot
4 be saved in said file, the not-yet-saved print command into
5 said memory.

1 20. A computer readable recording medium for recording
2 thereon a program for causing a computer to execute:
3 a converting/storing process operation for
4 converting print data into a print command having a
5 predetermined format and for storing the converted print
6 command into a first memory;
7 a first stopping process operation for stopping said
8 converting/storing process operation in the case that a
9 ratio of a print command amount stored into said first
10 memory to a storage capacity of said first memory is larger
11 than, or equal to a first threshold value;
12 a reading/storing process operation for reading said
13 stored print command and for storing said read print
14 command into a second memory;
15 a transmitting process operation for transmitting
16 the print command stored into said second memory to a
17 printing apparatus;
18 a releasing process operation for executing a
19 process operation such that a storage area of said first
20 memory from which said print command is read is rewritable;
21 a second stopping process operation for stopping
22 said reading/storing process operation in the case that a
23 ratio of a print command amount stored into said first
24 memory to the storage capacity of said first memory is
25 smaller than, or equal to a second threshold value; and
26 a third stopping process operation for stopping said

27 reading/storing process operation in such a case that a
28 ratio of a print command amount stored into said second
29 memory to a storage capacity of said second memory is
30 larger than, or equal to a third threshold value.

1 21. A printing control method comprising:
2 a converting/storing step for converting print data
3 into a print command having a predetermined format and for
4 storing said converted print command into a first memory;
5 a first stopping step for stopping said
6 converting/storing step in the case that a ratio of a print
7 command amount stored into said first memory to a storage
8 capacity of said first memory is larger than, or equal to a
9 first threshold value;
10 a reading/storing step for reading said stored print
11 command and for storing said read print command into a
12 second memory;
13 a transmitting step for transmitting the print
14 command stored into said second memory to a printing
15 apparatus;
16 a releasing step for executing a process operation
17 such that a storage area of said first memory from which
18 said print command is read is rewritable;
19 a second stopping step for stopping said
20 reading/storing step in the case that a ratio of a print
21 command amount stored into said first memory to the storage

22 capacity of said first memory is smaller than, or equal to
23 a second threshold value; and
24 a third stopping step for stopping said
25 reading/storing step in such a case that a ratio of a print
26 command amount stored into said second memory to a storage
27 capacity of said second memory is larger than, or equal to
28 a third threshold value.

1 22. A printing control apparatus comprising:

2 converting/storing means which converts print data
3 into a print command having a predetermined format and for
4 storing said converted print command into a first memory;

5 first stopping means which stops said
6 converting/storing means in the case that a ratio of a
7 print command amount stored into said first memory to a
8 storage capacity of said first memory is larger than, or
9 equal to a first threshold value;

10 reading/storing means which reads said stored print
11 command and for storing said read print command into a
12 second memory;

13 transmitting means which transmits the print command
14 stored into said second memory to a printing apparatus;

15 releasing means which executes a process operation
16 such that a storage area of said first memory from which
17 said print command is read is rewritable;

18 second stopping means which stops said

19 reading/storing means in the case that a ratio of a print
20 command amount stored into said first memory to the storage
21 capacity of said first memory is smaller than, or equal to
22 a second threshold value; and

23 third stopping means which stops said
24 reading/storing means in such a case that a ratio of a
25 print command amount stored into said second memory to a
26 storage capacity of said second memory is larger than, or
27 equal to a third threshold value.

ABSTRACT OF THE DISCLOSURE

In a computer readable recording medium for recording thereon a program, the program causes a computer to execute: a process operation for storing a print command converted from print data into a memory; a process
5 operation for reading the stored print command to transmit the read print command to a printing apparatus; and process operation executed by such that when a print command is read out, the storage area of the memory where the print command has been stored is rewritable. As a
10 result, it is possible to provide a printing control technique capable of storing print commands into a small number of storage areas even when a total amount of these print commands is increased, and also capable of avoiding an interruption of printing operation.

FIG. 1

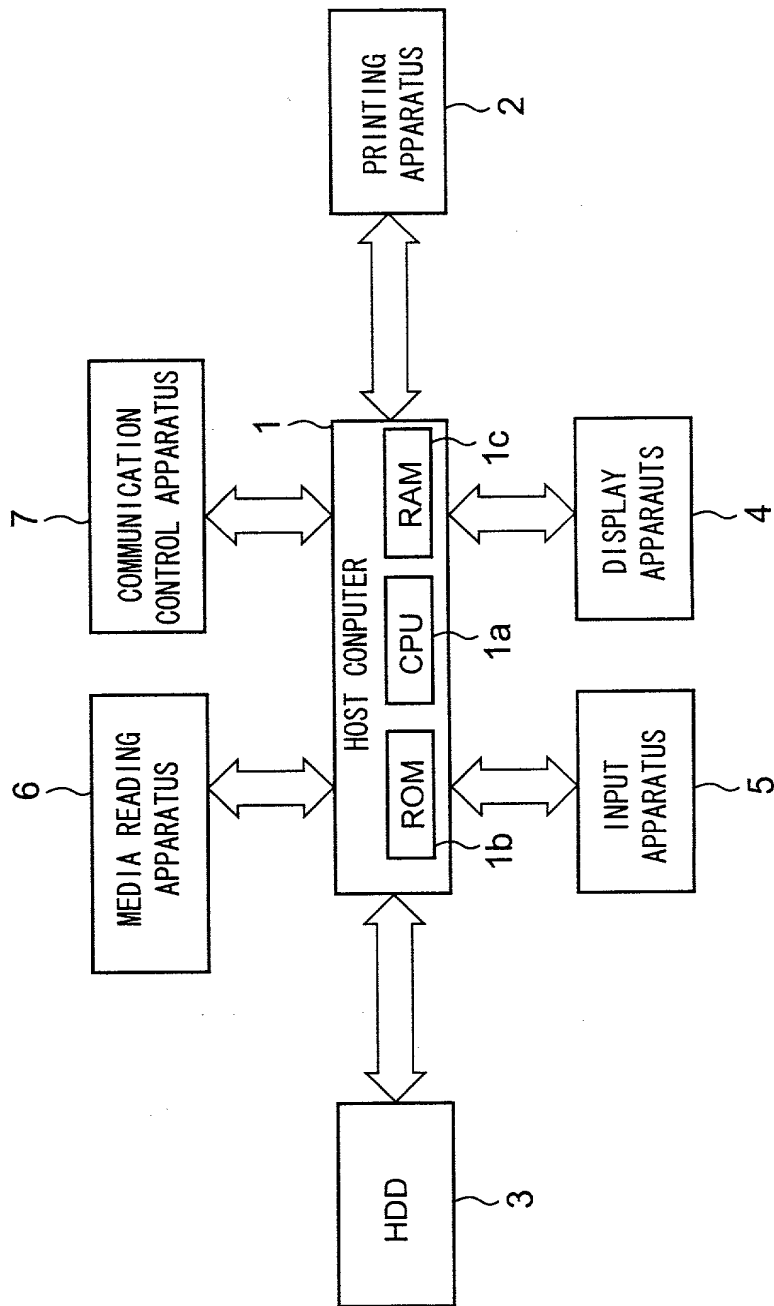


FIG. 2

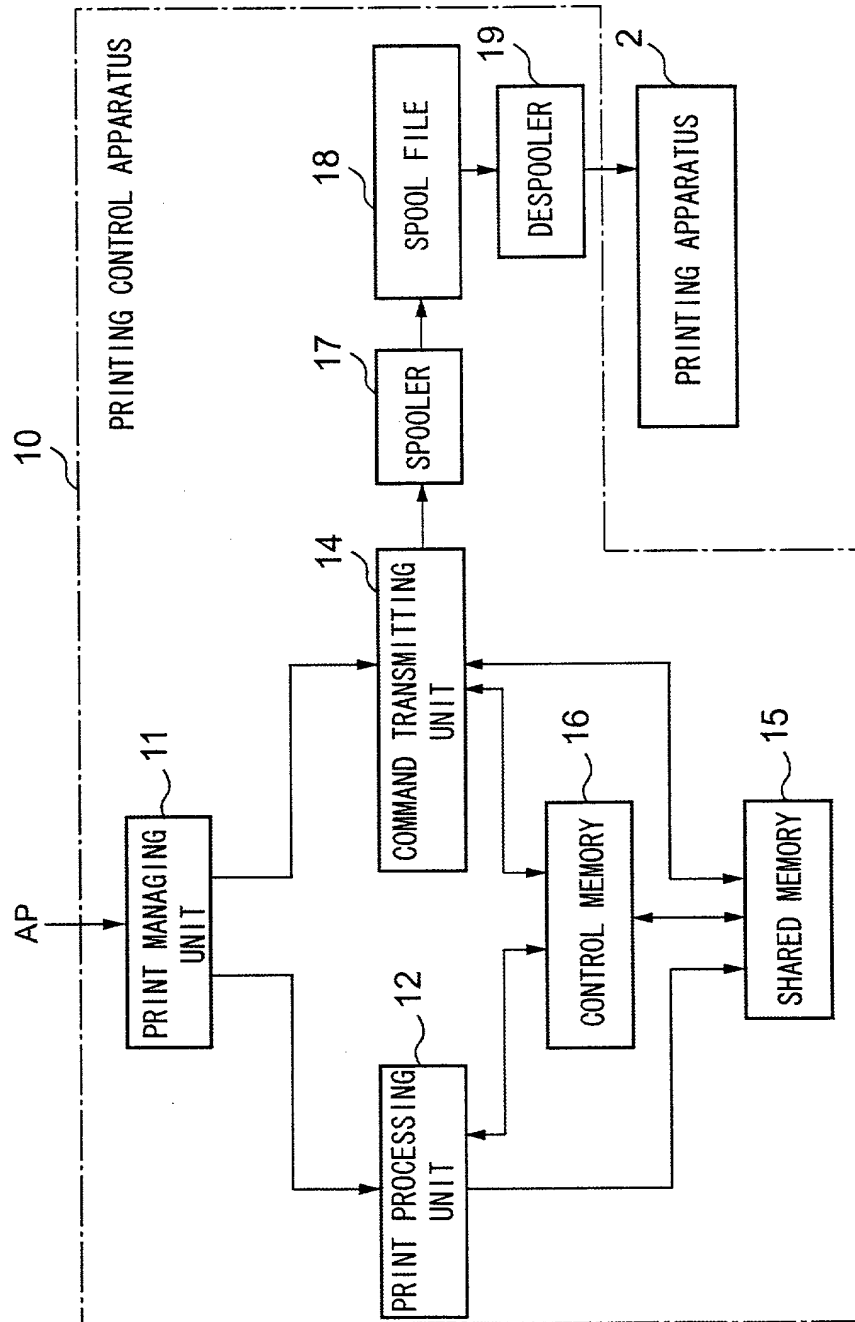


FIG. 3

MEMORY SIZE M	16a
ALL WRITE AMOUNT W	16b
ALL READ AMOUNT R	16c
DATA AMOUNT (W-R)	16d
READ HANDLE	16e
WRITE HANDLE	16f
BLOCK ID	16g
ADDRESS	16h
BLOCK ID	16i
ADDRESS	16j
...	
...	

FIG. 4

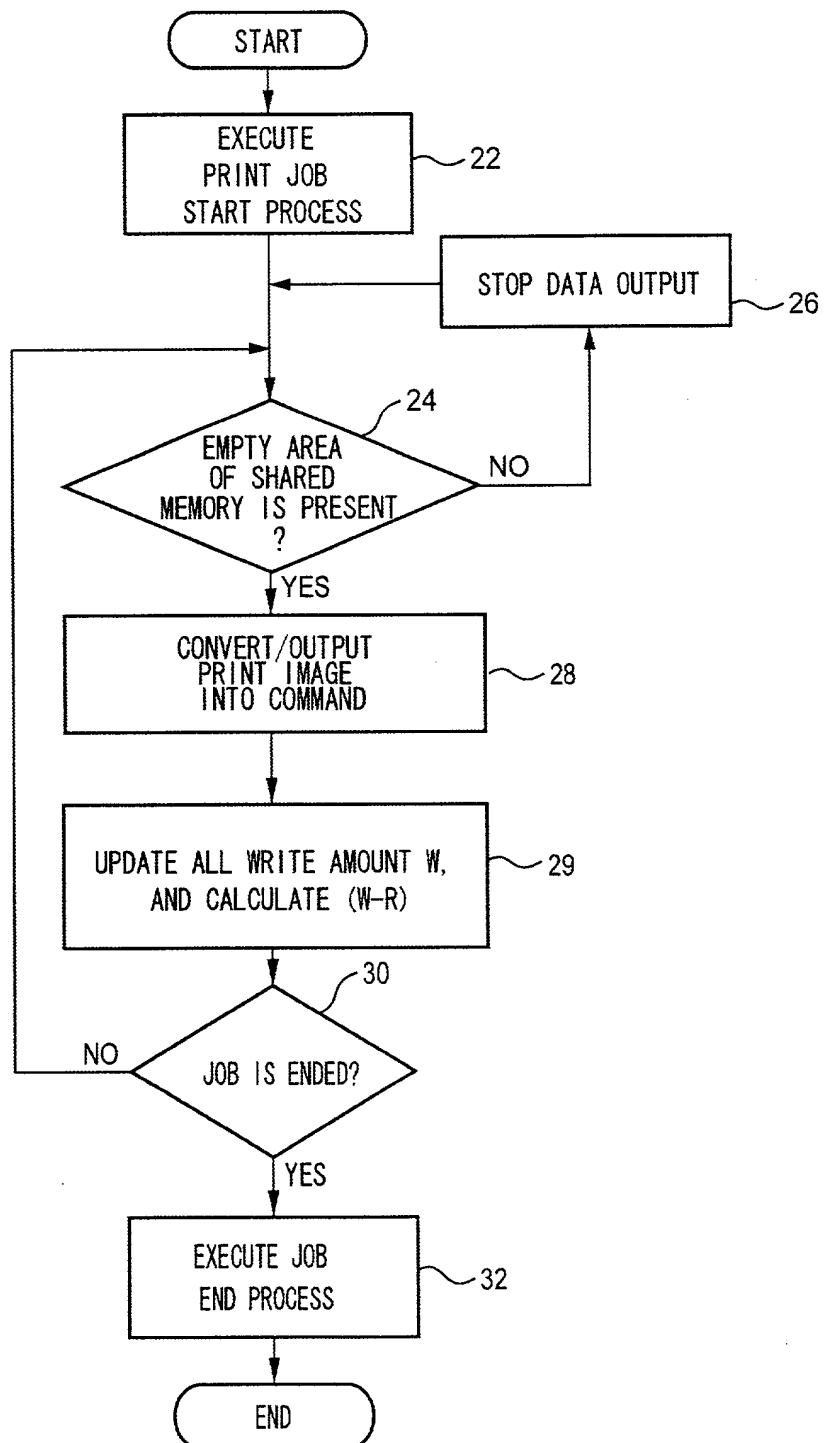


FIG. 5

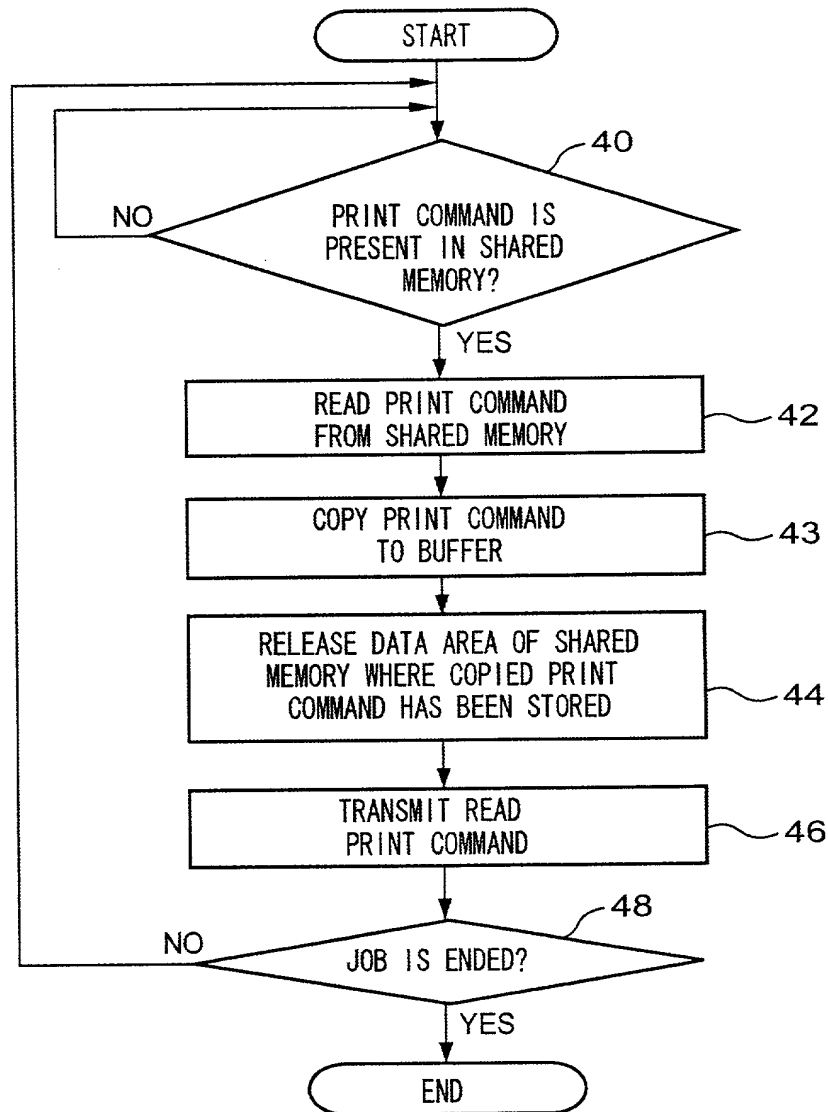


FIG. 6

MEMORY SIZE M	16a
ALL WRITE AMOUNT W	16b
ALL READ AMOUNT R	16c
DATA AMOUNT (W-R)	16d
READ HANDLE	16e
WRITE HANDLE	16f
BLOCK ID	16g
ADDRESS	16h
BLOCK ID	16i
ADDRESS	16j
THRESHOLD VALUE α OF OCCUPATION RATIO	16x
THRESHOLD VALUE β OF OCCUPATION RATIO	16y
JOB END FLAG	16z

FIG. 7

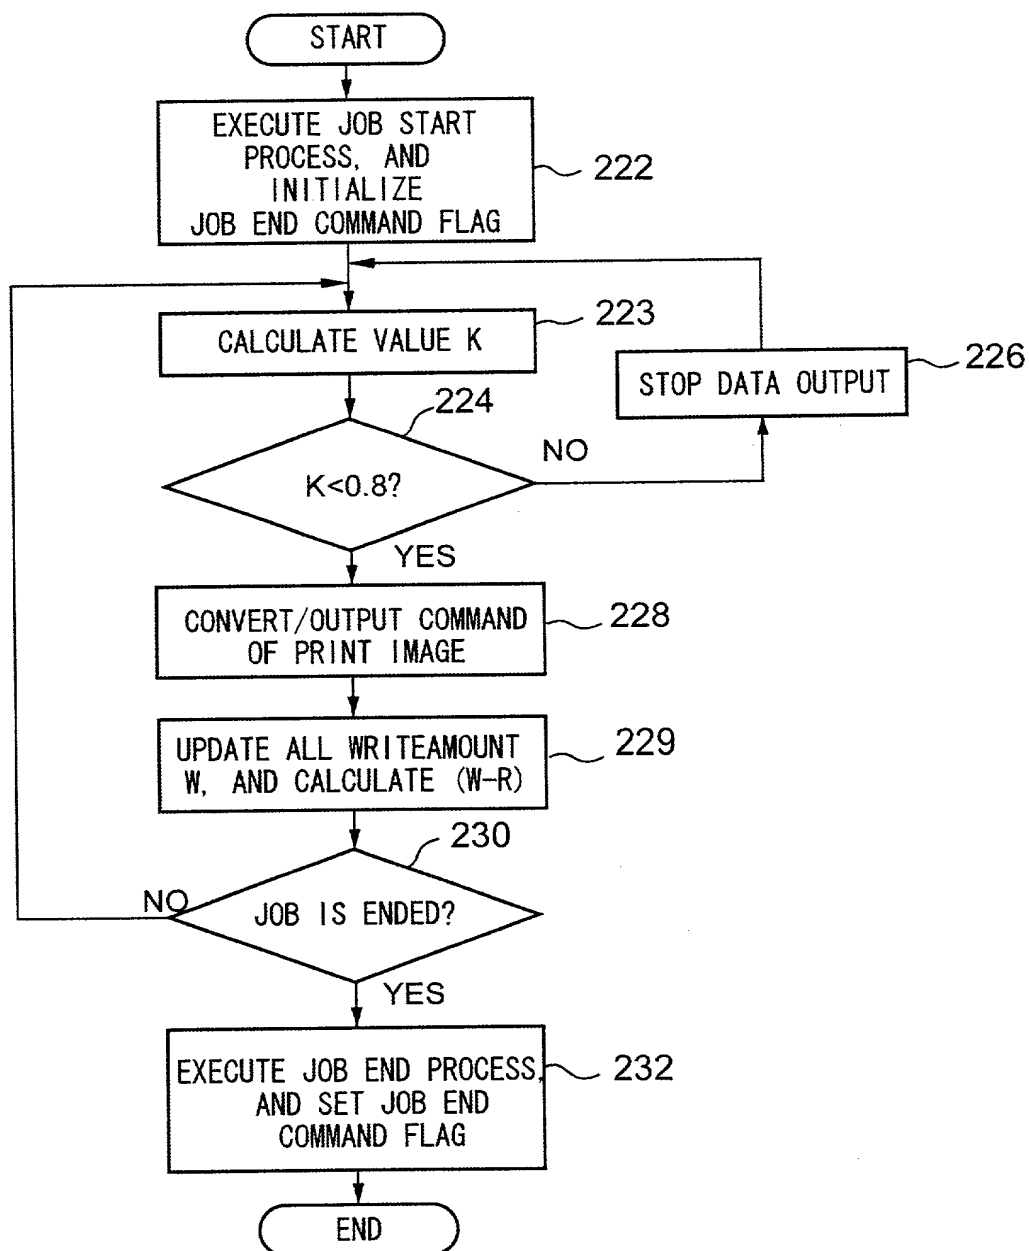


FIG. 8

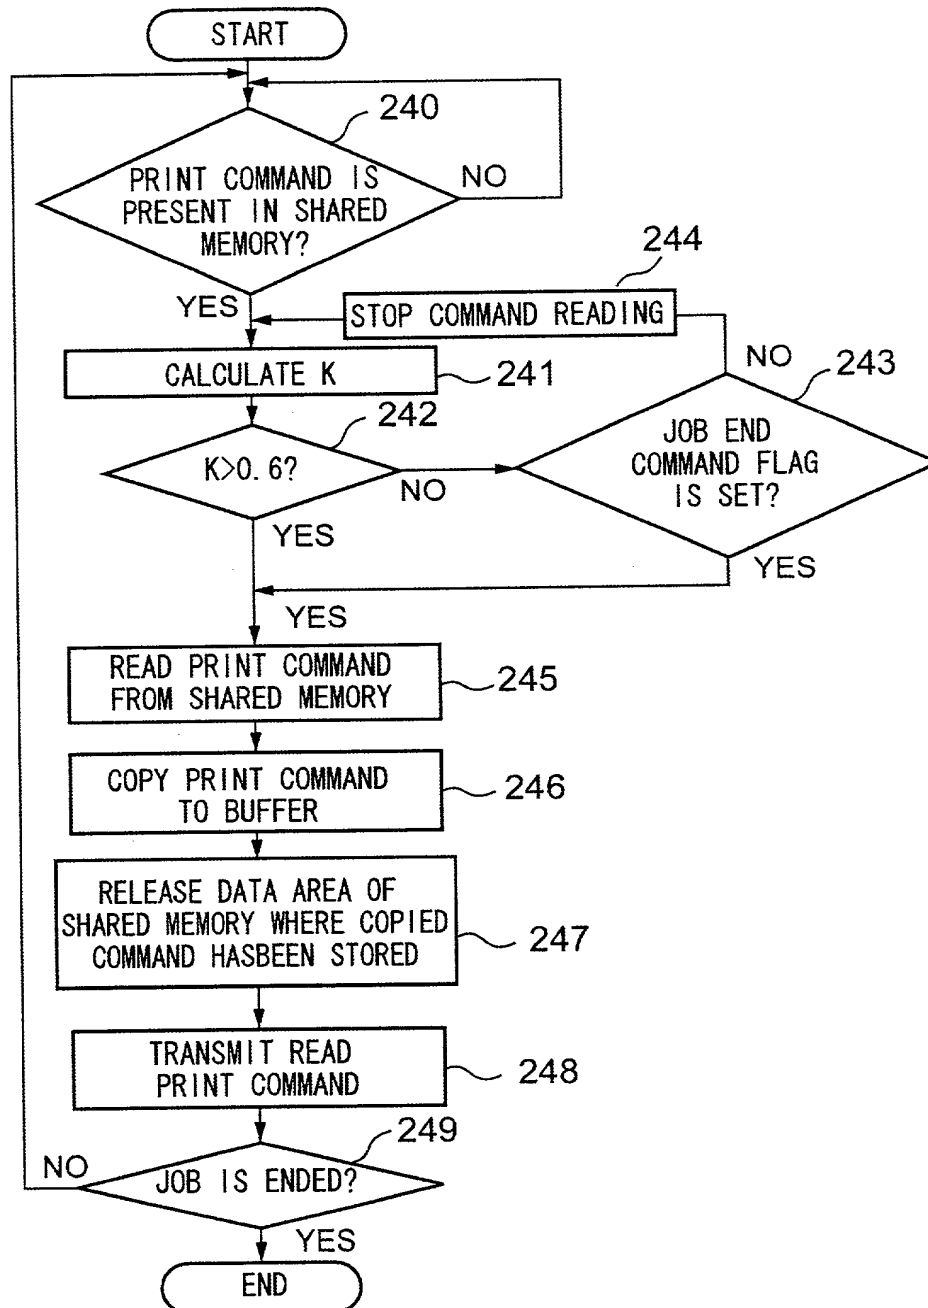


FIG. 9

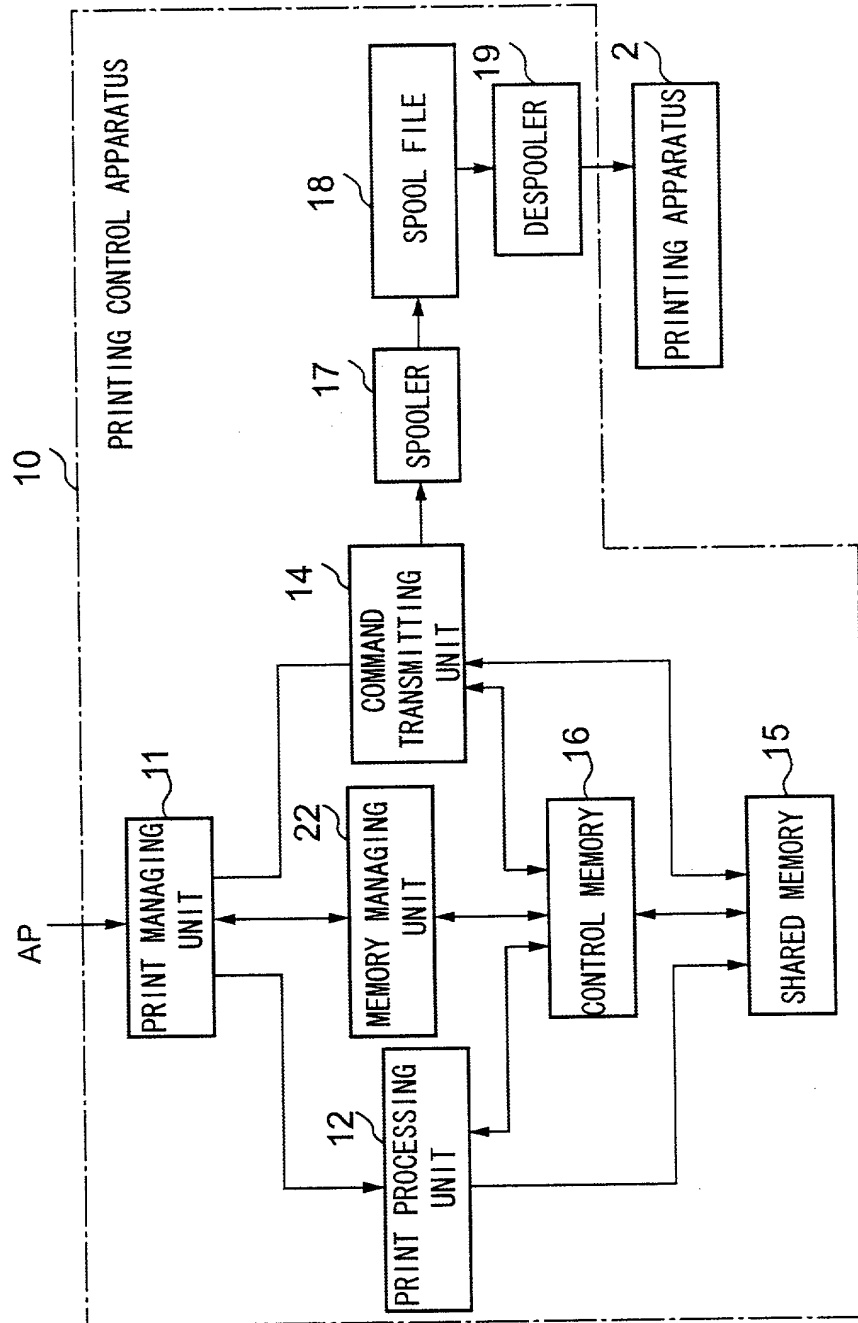


FIG. 10

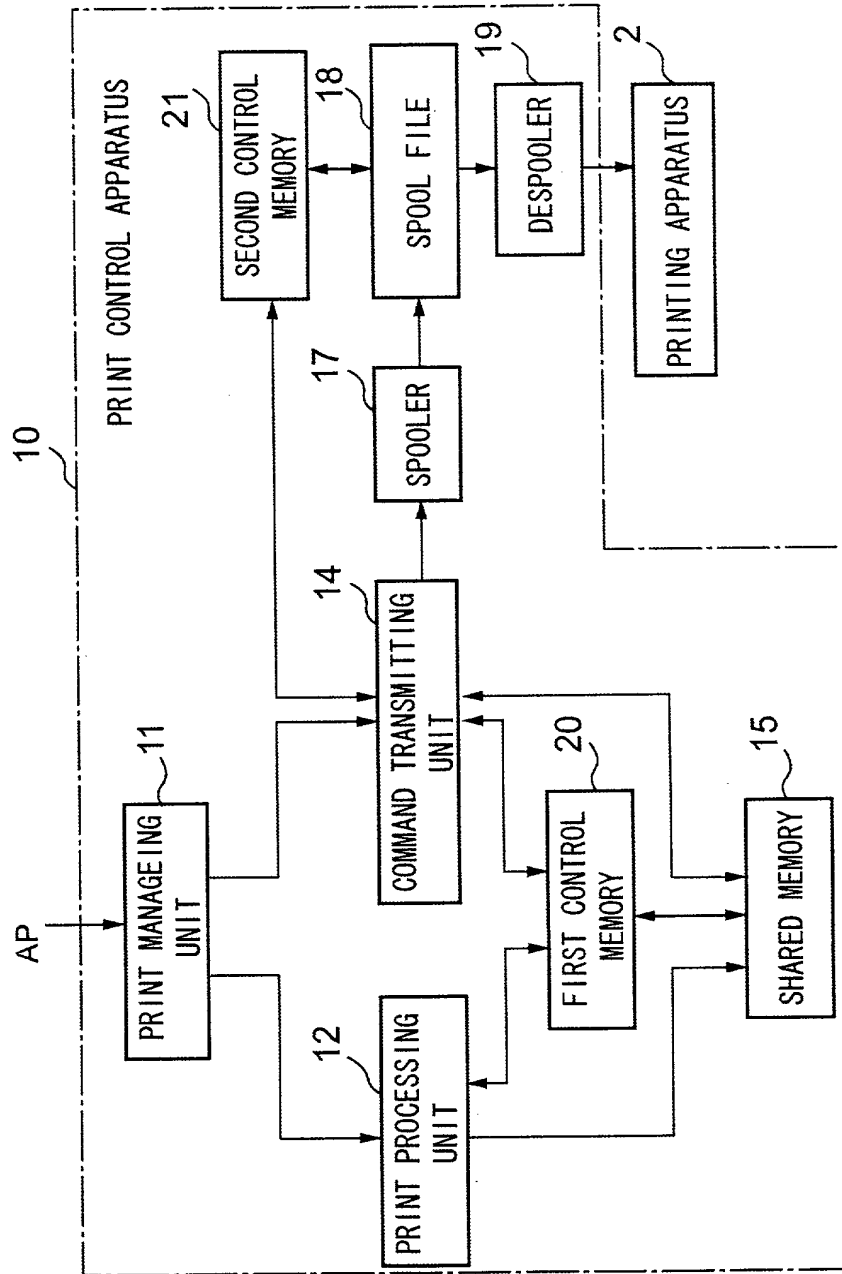


FIG. 11

MEMORY SIZE M1	20a
ALL WRITE AMOUNT W1	20b
ALL READ AMOUNT R1	20c
DATA AMOUNT (W1-R1)	20d
READ HANDLE	20e
WRITE HANDLE	20f
BLOCK ID	20g
ADDRESS	20h
BLOCK ID	20i
ADDRESS	20j
THRESHOLD VALUE α 1 OF OCCUPATION RATIO	20x
THRESHOLD VALUE β 1 OF OCCUPATION RATIO	20y
JOB END FLAG	20z

FIG. 12

MEMORY SIZE M2	21a
ALL WRITE AMOUNT W2	21b
ALL READ AMOUNT R2	21c
DATA AMOUNT (W2-R2)	21d
READ HANDLE	21e
WRITE HANDLE	21f
BLOCK ID	21g
ADDRESS	21h
BLOCK ID	21i
ADDRESS	21j
THRESHOLD VALUE $\propto 2$ OF OCCUPATION RATIO	21x
⋮	
JOB END FLAG	21z

FIG. 13

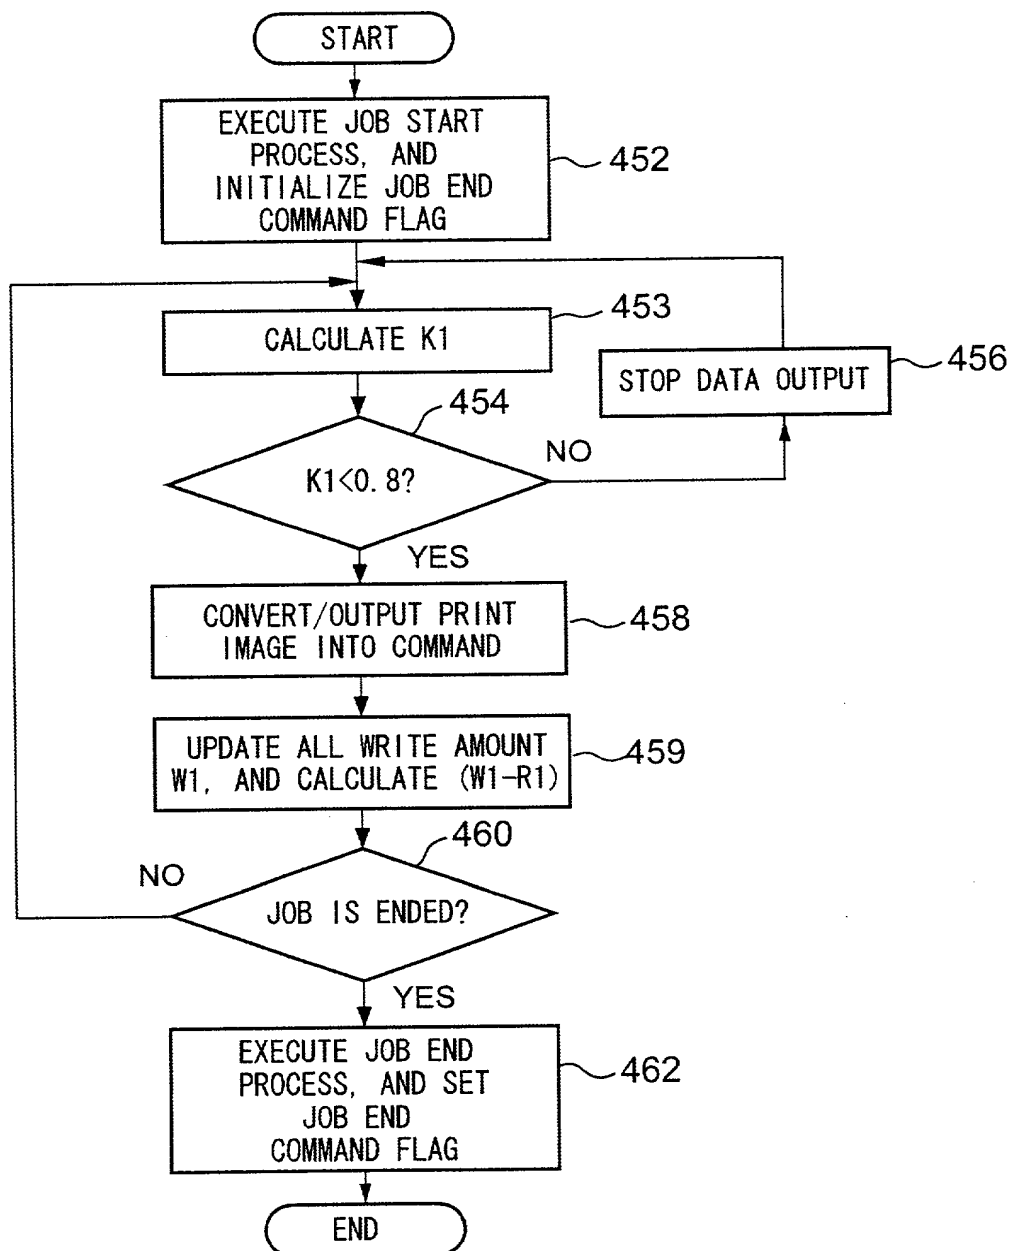


FIG. 14

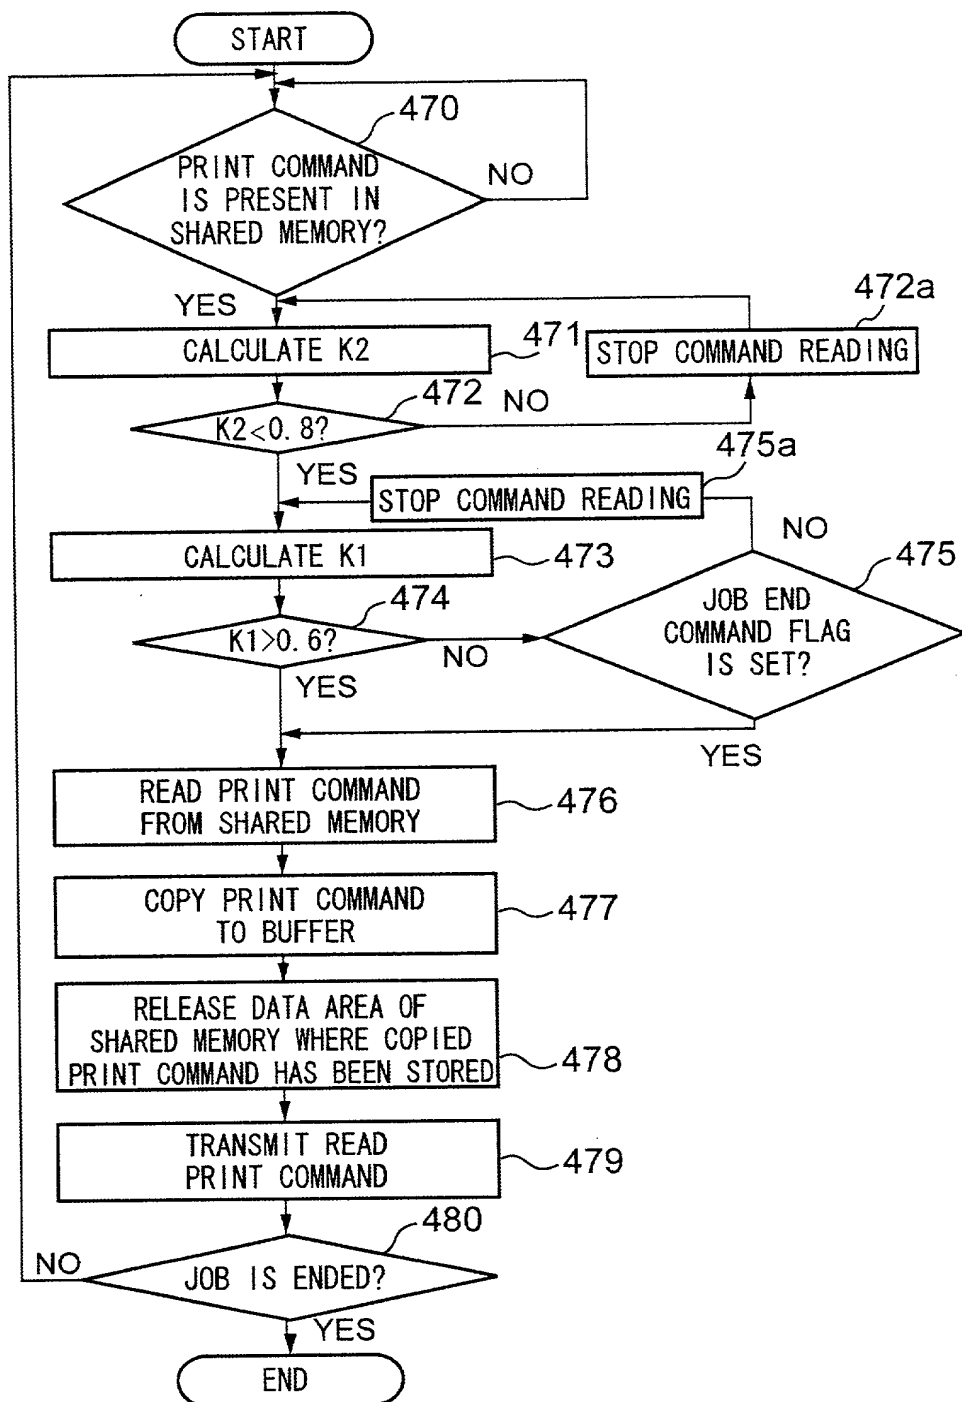


FIG. 15

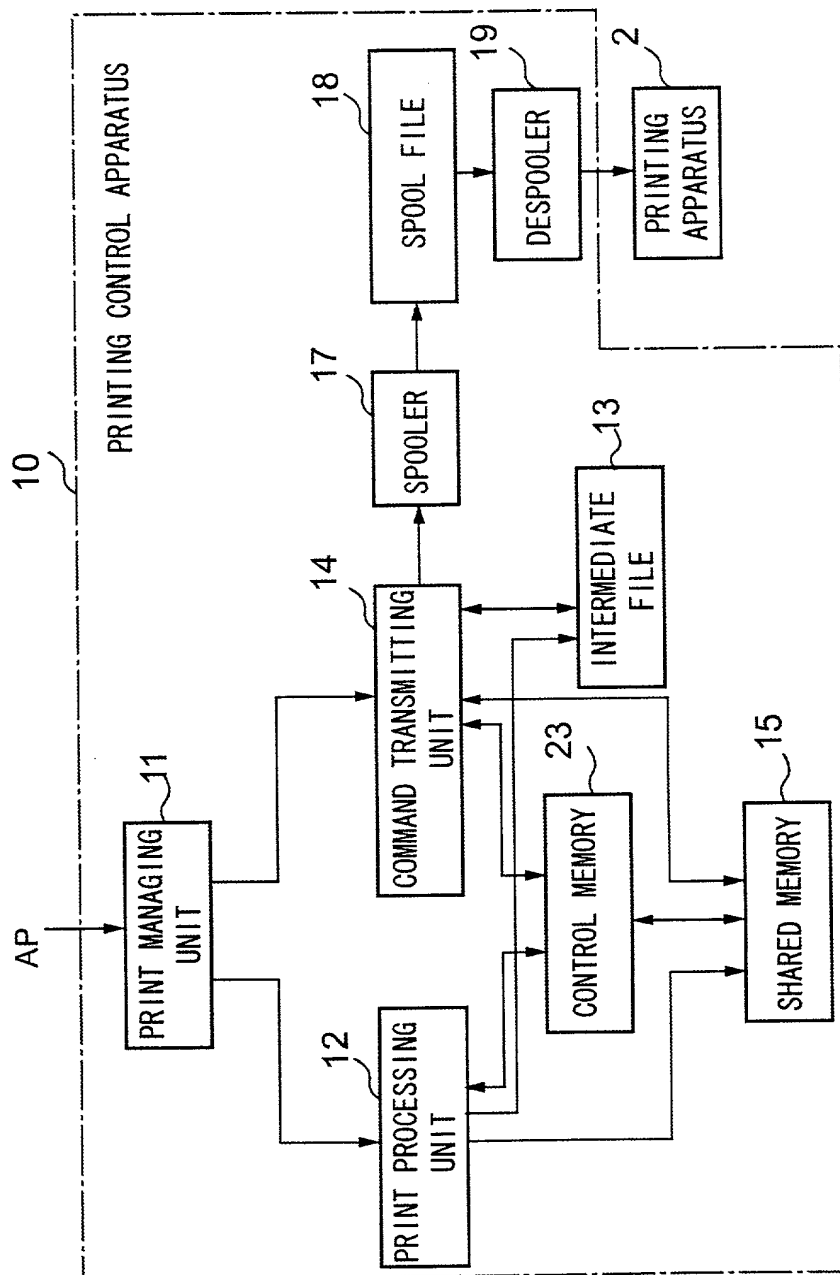


FIG. 16

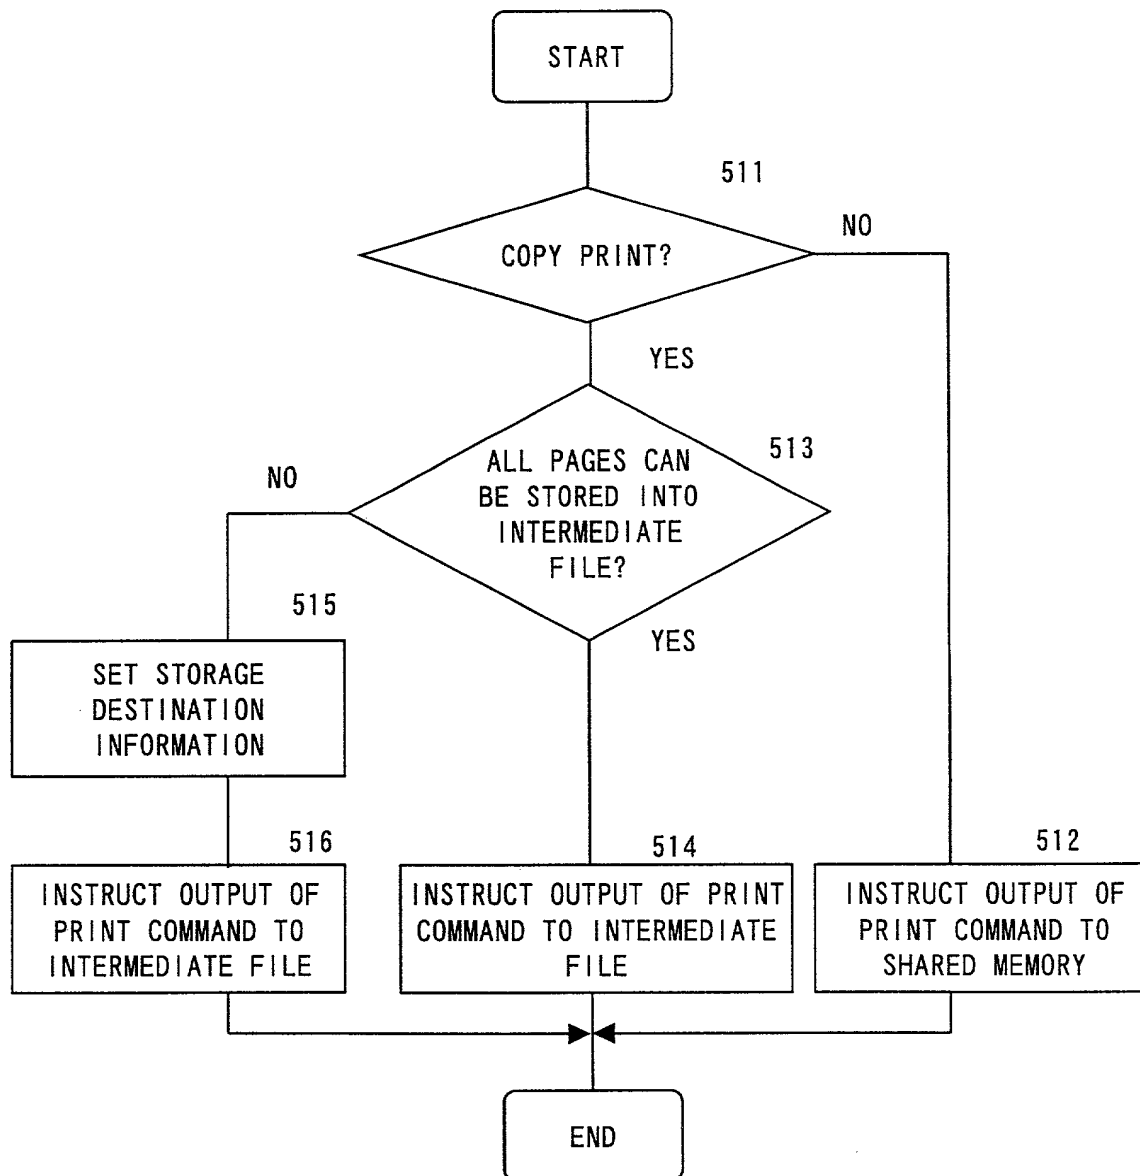


FIG. 17

PAGE ID	23a
STORAGE DESTINATION	23b
PAGE ID	23c
STORAGE DESTINATION	23d
PAGE ID	23e
STORAGE DESTINATION	23f
PAGE ID	23g
STORAGE DESTINATION	23h
PAGE ID	23i
STORAGE DESTINATION	23j
...	
...	

FIG. 18

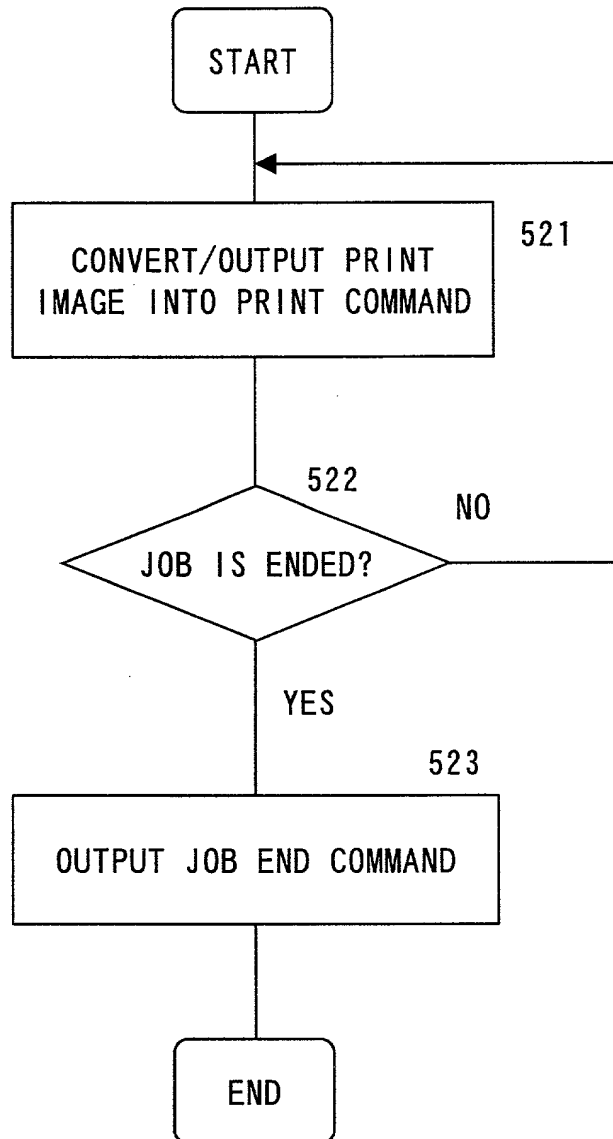


FIG. 19

19/19

